




Tabs 0.5 - 6 mm²

■ Data: brass, tin plated, brazed necks.

■ PC sleeves have EasyEntry, PC and PA sleeves are halogen free.

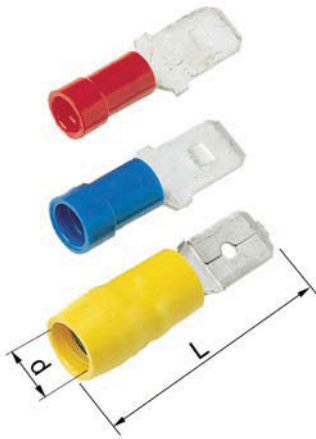

	mm ²	Cat.no.	mm d	L	For receptacles	s	Pcs/pack	Rec. tool	Insulation
	0,5-1,5	A1507H	4,0	22	6,3x0,8	7	100	GSA0760	PC
	1,5-2,5	A2507H	4,5	22	6,3x0,8	8	100	GSA0760	PC
	4-6	A4607H	6,3	25	6,3x0,8	9	100	GSA0760	PVC*

s = strip length * non-brazed with reinforcement sleeve, no EasyEntry.

For detailed information regarding recommended tool, see tool section at the end of this chapter.