




### End connectors, fully insulated, 1 - 6 mm<sup>2</sup>

■ Data: Copper tube, tin plated.

■ Insulation sleeves are halogen free, PA. EasyEntry.

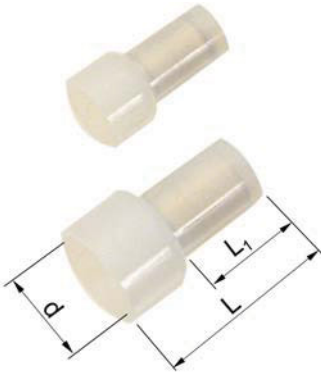

mm <sup>2</sup>	Cat. no.	mm d	L <sub>1</sub>	L	s	Pcs/pack	Rec. tool	Insulation
1-3	A2500E	6,4	8,0	15,2	8	100	GSA0760	PA
4-6	A4600E	9,2	9,0	17,7	9	100	GSA0760	PA

s = strip length

For detailed information regarding recommended tool, see tool section at the end of this chapter.