




Parallel connectors 0.5 - 6 mm²

■ Data: Cu 99.95%, tin plated.

■ Insulation sleeves are halogen free.

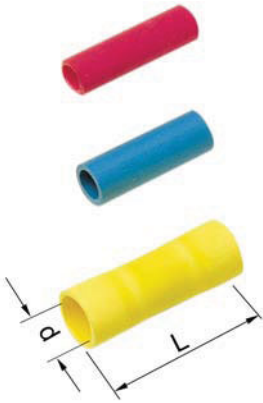

	mm ² Total	Cat. no.	mm d	L	s	Pcs/ pack	Rec. tool	Insu- lation
■	0,5-1,5	A1515PSK	3,2	17,0	7	100	GSA0760	PA
■	1,5-2,5	A2517PSK	4	17,0	8	100	GSA0760	PA
■	4-6	A4634PSK	5,6	21	9	100	GSA0760	PA

s = strip length

Type PSK must be crimped with GSA0760 (C) and with two crimps.

For detailed information regarding recommended tool, see tool section at the end of this chapter.