


**Fork terminals 0.25 - 10 mm²**

■ Data: Cu 99.95%, tin plated, brazed necks.

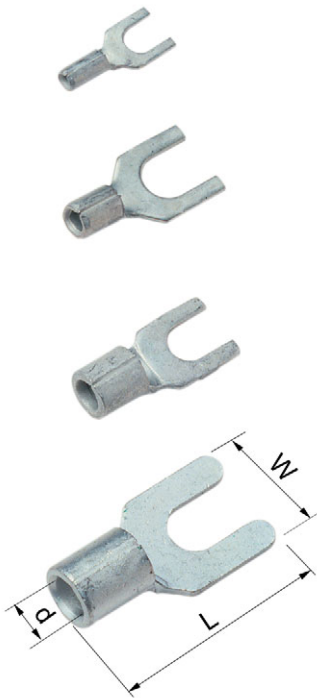

mm ²	Cat. no.	Screw	mm W	d	t	L	s	Pcs/ pack	Rec. tool
0,25-0,75	B0832G	M3	5,5	1,3	0,5	13,0	7	100	DKB0325
	B0843G	M4	7,5	1,3	0,5	16,2	7	100	DKB0325
0,75-1,5	B1532G	M3	5,5	1,8	0,7	13,0	7	100	DKB0325, DKB0760
	B1537GS	M3,5	5,5	1,8	0,7	16,2	7	100	DKB0325, DKB0760
	B1543G	M4	7,0	1,8	0,7	16,2	7	100	DKB0325, DKB0760
	B1553G	M5	9,0	1,8	0,7	17,0	7	100	DKB0325, DKB0760
1,5-2,5	B2532G	M3	5,5	2,3	0,8	13,0	8	100	DKB0325, DKB0760
	B2543G	M4	7,0	2,3	0,8	16,2	8	100	DKB0325, DKB0760
	B2553G	M5	9,0	2,3	0,8	17,0	8	100	DKB0325, DKB0760
4-6	B4643G	M4	7,8	3,4	1,0	18,0	9	100	DKB0760, GWB4099
	B4653G	M5	9,0	3,4	1,0	18,0	9	100	DKB0760, GWB4099
10	B9953G	M5	12,0	4,6	1,2	24	11	100	GWB4099
	B9965G	M6	11,0	4,6	1,1	23	8	100	GWB4099

t = palm thickness s = strip length

For detailed information regarding recommended tool, see tool section at the end of this chapter.