




### Pin terminals 0.1 - 6 mm<sup>2</sup>

■ Data: Cu 99.95%, tin plated, brazed necks.

■ PC sleeves have EasyEntry, PC and PA sleeves are halogen free.

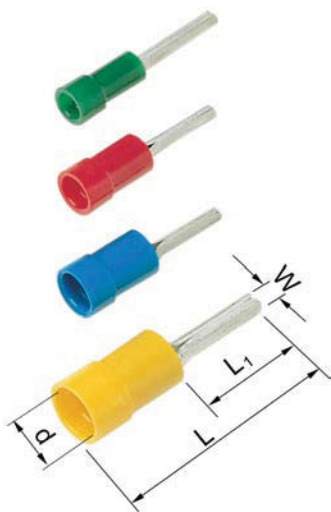

	mm <sup>2</sup>	Cat. no.	mm W	d	L <sub>1</sub>	L	s	Pcs/ pack	Rec. tool	Insu- lation
	0,1-0,5	A0514SR	1,4	2,0	8,0	18,0	6	100	DSA0115	PA*
	0,25-0,75	A0819SR	1,8	3,2	12,0	22	7	100	DSA0115	PC
		A0819SRK	1,8	3,2	8,5	18,5	7	100	DSA0115	PC
	0,5-1,5	A1519SR	1,7	4,0	12,0	22	7	100	GSA0760	PC
		A1519SRK	1,7	4,0	8,5	18,5	7	100	GSA0760	PC
	1,5-2,5	A2519SR	1,9	4,5	11,5	21,5	8	100	GSA0760	PC
		A2519SRK	1,9	4,5	8,5	18,5	8	100	GSA0760	PC
	4-6	A4630SR	2,7	6,4	14,0	27	9	100	GSA0760	PC

s = strip length \* no EasyEntry

For detailed information regarding recommended tool, see tool section at the end of this chapter.