




## Ring terminals 0.1 - 6 mm<sup>2</sup>

■ Data: Cu 99.95%, tin plated, brazed necks.

■ PC sleeves have EasyEntry, PC and PA sleeves are halogen free.

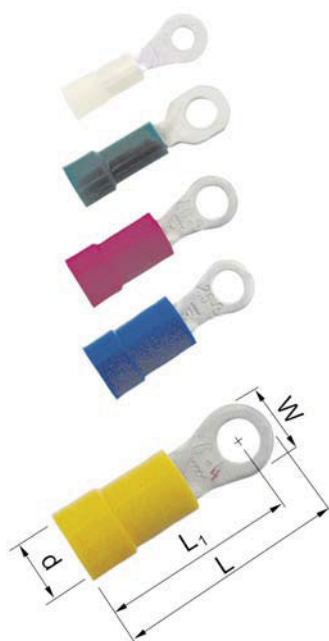

	mm <sup>2</sup>	Cat. no.	Screw	mm W	d	t	L <sub>1</sub>	L	s	Rec. tool	Pcs/pack	Insulation
Yellow	0,1-0,5	A0522R	M2	5,4	2,0	0,5	14,0	16,0	6	DSA0115	100	PA*
		A0532R	M3	5,0	2,0	0,5	14,0	16,0	6	DSA0115	100	PA*
		A0543R	M4	7,0	2,0	0,5	16,0	19,0	6	DSA0115	100	PA*
		A0553R	M5	8,0	2,0	0,5	15,0	19,0	6	DSA0115	100	PA*
Green	0,25-0,75	A0832R	M3	5,5	3,2	0,5	15,0	18,0	7	DSA0115	100	PC
		A0837R	M3,5	6,2	3,2	0,5	17,5	21	7	DSA0115	100	PC
		A0843R	M4	7,5	3,2	0,5	17,5	21	7	DSA0115	100	PC
		A0853R	M5	9	3,2	0,5	17,5	22	7	DSA0115	100	PC
Red	0,5-15	A1532R	M3	5,5	4,0	0,7	16,0	19,0	7	GSA0760	100	PC
		A1537R	M3,5	6,0	4,0	0,7	16	19	7	GSA0760	100	PC
		A1543R	M4	7,5	4,0	0,7	17	20,5	7	GSA0760	100	PC
		A1553R	M5	9,0	4,0	0,7	18	22,5	7	GSA0760	100	PC
		A1565R	M6	11,0	4,0	0,7	21	26,5	7	GSA0760	100	PC
		A1585R	M8	14,0	4,0	0,7	20	27,5	7	GSA0760	100	PC
		A1510R	M10	16,5	4,0	0,7	22	30,5	7	GSA0760	100	PC
Blue	1,5-2,5	A2532R	M3	5,5	4,5	0,8	16	19	8	GSA0760	100	PC
		A2537R	M3,5	6	4,5	0,8	16	19	8	GSA0760	100	PC
		A2543R	M4	7	4,5	0,8	17,5	21	8	GSA0760	100	PC
		A2553R	M5	9,0	4,5	0,8	18	23	8	GSA0760	100	PC
		A2565R	M6	11,0	4,5	0,8	20,6	26,1	8	GSA0760	100	PC
		A2585R	M8	14,0	4,5	0,8	20	27,5	8	GSA0760	100	PC
		A2510R	M10	16,5	4,5	0,75	22	30,5	8	GSA0760	100	PC
		A2513R	M12	19,0	4,5	0,75	25	34	8	GSA0760	100	PA
Yellow	4-6	A4643R	M4	7,8	6,4	1,0	20,5	24,5	9	GSA0760	100	PC
		A4653R	M5	9,0	6,4	1,0	20,5	25	9	GSA0760	100	PC
		A4665R	M6	11,0	6,4	1,0	23	28,5	9	GSA0760	100	PC
		A4685R	M8	14,0	6,4	1,0	23,8	30,8	9	GSA0760	100	PC
		A4610R	M10	17,0	6,4	1,0	25,5	34	9	GSA0760	50	PC
		A4613R	M12	19,2	6,8	1,0	31	40	9	GSA0760	50	PVC*

t = palm thickness s = strip length \* no EasyEntry

For detailed information regarding recommended tool, see tool section at the end of this chapter.