




Blade terminals 0.25 - 6 mm²

■ Data: Cu 99.95%, tin plated, brazed necks.

■ PC sleeves have EasyEntry, PC and PA sleeves are halogen free.

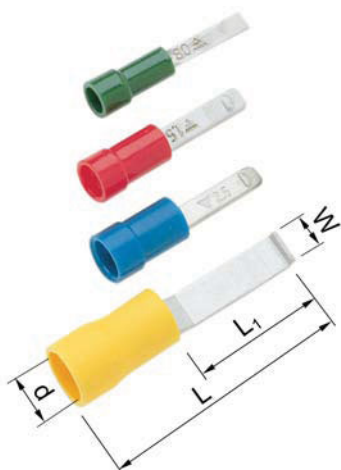

	mm ²	Cat. no.	mm W	d	t	L ₁	L	s	Pcs/ pack	Rec. tool	Insu- lation
	0,25-0,75	A0825SFK	2,5	3,2	0,5	10,0	20	7	100	DSA0115	PC
	0,5-1,5	A1518SFL	2,3	4,6	0,8	18,0	27	7	100	GSA0760	PVC
		A1529SF	2,9	4,0	0,7	12,0	22	7	100	GSA0760	PC
		A1529SFN	2,9	4	0,7	12	22	7	100	GSA0760	PC**
		A1530SFB	3,0	4,5	0,8	17,5	27	7	100	GSA0760	PVC
	1,5-2,5	A2524SFL	2,4	4,5	0,8	18,0	28	8	100	GSA0760	PVC
		A2529SF	2,9	4,3	0,7	11,5	21,5	8	100	GSA0760	PC
		A2529SFN	2,9	4,3	0,7	12	22	8	100	GSA0760	PC**
		A2530SFB	3	4,6	0,7	17,5	27	8	100	GSA0760	PVC
	4-6	A4640SF	4	6,7	1,0	13,0	27	9	100	GSA0760	PVC*
		A4645SFB	4,5	6,7	1,0	17,5	32	9	100	GSA0760	PVC*

t = palm thickness s = strip length * no EasyEntry ** with tab

For detailed information regarding recommended tool, see tool section at the end of this chapter.