


TYPE: **EE20/10-ZA**

NOMINAL POWER: **0,5 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Short-circuit proof
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 35 g

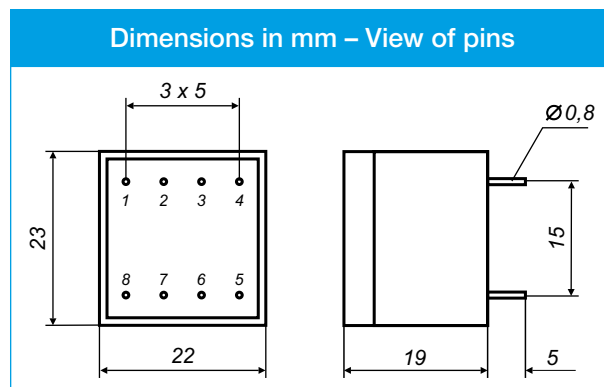

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins
321350	230	1-4	6	83	11,0	6-7	
321351	230	1-4	7,5	66	13,7	6-7	
321352	230	1-4	9	55	16,5	6-7	
321354	230	1-4	12	41	20,6	6-7	
321356	230	1-4	15	33	26,0	6-7	
321358	230	1-4	18	27	31,1	6-7	
321360	230	1-4	24	20	41,1	6-7	
321362	230	1-4	2 x 6	2 x 41	2 x 10,9	5-6 / 7-8	
321363	230	1-4	2 x 7,5	2 x 33	2 x 13	5-6 / 7-8	
321364	230	1-4	2 x 9	2 x 27	2 x 16,4	5-6 / 7-8	
321366	230	1-4	2 x 12	2 x 20	2 x 20,6	5-6 / 7-8	
321368*	230	1-4	2 x 15	2 x 16	2 x 25,8	5-6 / 7-8	
321370*	230	1-4	2 x 18	2 x 13	2 x 30,9	5-6 / 7-8	
321372*	230	1-4	2 x 24	2 x 10	2 x 41,3	5-6 / 7-8	
321374	115	1-4	6	83	11,0	6-7	
321375	115	1-4	7,5	66	13,7	6-7	
321376	115	1-4	9	55	16,5	6-7	
321378	115	1-4	12	41	20,6	6-7	
321380	115	1-4	15	33	26,0	6-7	
321381	115	1-4	18	27	31,1	6-7	
321384	115	1-4	24	20	41,1	6-7	
321386	115	1-4	2 x 6	2 x 41	2 x 10,9	5-6 / 7-8	
321387	115	1-4	2 x 7,5	2 x 33	2 x 13,0	5-6 / 7-8	
321388	115	1-4	2 x 9	2 x 27	2 x 16,4	5-6 / 7-8	
321390	115	1-4	2 x 12	2 x 20	2 x 20,6	5-6 / 7-8	
321392*	115	1-4	2 x 15	2 x 16	2 x 25,8	5-6 / 7-8	
321394*	115	1-4	2 x 18	2 x 13	2 x 30,9	5-6 / 7-8	
321396*	115	1-4	2 x 24	2 x 10	2 x 41,3	5-6 / 7-8	

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.