


TYPE: **EI30/5-ZA**

NOMINAL POWER: **0,5 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Short-circuit proof
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 60 g

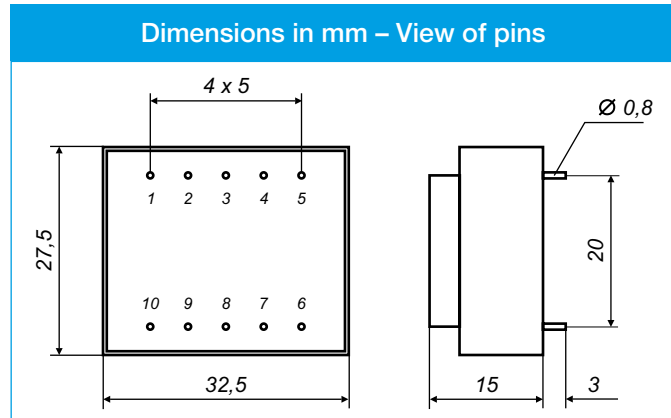

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins
321000	230	1-5	6	83	9,7	7-9	
321032	230	1-5	7,5	66	12,1	7-9	
321002	230	1-5	9	55	14,1	7-9	
321004	230	1-5	12	42	20,5	7-9	
321006	230	1-5	15	33	24,6	7-9	
321008	230	1-5	18	28	28,4	7-9	
321010	230	1-5	24	20	37,0	7-9	
321020	230	1-5	2 x 6	2 x 42	2 x 10,1	6-7 / 9-10	
321033	230	1-5	2 x 7,5	2 x 33	2 x 12,3	6-7 / 9-10	
321022	230	1-5	2 x 9	2 x 28	2 x 15,6	6-7 / 9-10	
321024	230	1-5	2 x 12	2 x 20	2 x 19,9	6-7 / 9-10	
321026	230	1-5	2 x 15	2 x 16	2 x 23,3	6-7 / 9-10	
321028*	230	1-5	2 x 18	2 x 13	2 x 27,9	6-7 / 9-10	
321030*	230	1-5	2 x 24	2 x 10	2 x 37,2	6-7 / 9-10	
321001	115	1-5	6	83	9,7	7-9	
321034	115	1-5	7,5	66	12,1	7-9	
321003	115	1-5	9	55	14,1	7-9	
321005	115	1-5	12	42	20,5	7-9	
321007	115	1-5	15	33	24,6	7-9	
321009	115	1-5	18	28	28,4	7-9	
321011	115	1-5	24	20	37,0	7-9	
321021	115	1-5	2 x 6	2 x 42	2 x 10,1	6-7 / 9-10	
321035	115	1-5	2 x 7,5	2 x 33	2 x 12,3	6-7 / 9-10	
321023	115	1-5	2 x 9	2 x 28	2 x 15,6	6-7 / 9-10	
321025	115	1-5	2 x 12	2 x 20	2 x 19,9	6-7 / 9-10	
321027	115	1-5	2 x 15	2 x 16	2 x 23,3	6-7 / 9-10	
321029*	115	1-5	2 x 18	2 x 13	2 x 27,9	6-7 / 9-10	
321031*	115	1-5	2 x 24	2 x 10	2 x 37,2	6-7 / 9-10	

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.