


TYPE: **EI30/5-ZA**

NOMINAL POWER: **0,6 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Short-circuit proof
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 60 g

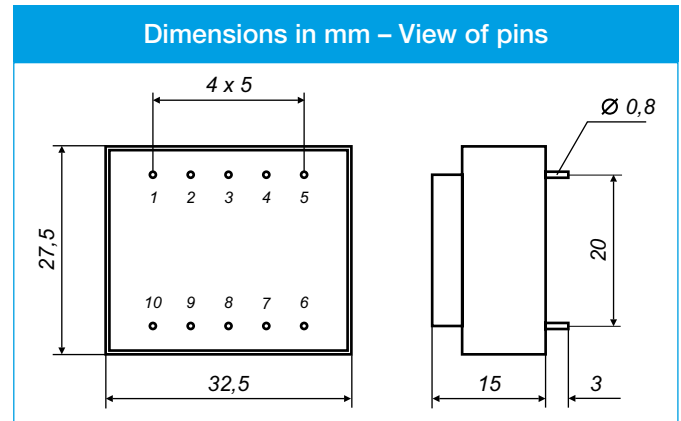

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins
332000	230	1-5	6	100	9,9	7-9	
332024	230	1-5	7,5	80	12,4	7-9	
332001	230	1-5	9	66	15,0	7-9	
332002	230	1-5	12	50	19,9	7-9	
332003	230	1-5	15	40	24,9	7-9	
332004	230	1-5	18	33	29,9	7-9	
332005	230	1-5	24	25	39,8	7-9	
332006	230	1-5	2 x 6	2 x 50	2 x 9,9	6-7 / 9-10	
332025	230	1-5	2 x 7,5	2 x 40	2 x 12,5	6-7 / 9-10	
332007	230	1-5	2 x 9	2 x 33	2 x 15,0	6-7 / 9-10	
332008	230	1-5	2 x 12	2 x 25	2 x 19,9	6-7 / 9-10	
332009*	230	1-5	2 x 15	2 x 20	2 x 24,9	6-7 / 9-10	
332010*	230	1-5	2 x 18	2 x 17	2 x 29,9	6-7 / 9-10	
332011*	230	1-5	2 x 24	2 x 12	2 x 39,8	6-7 / 9-10	
332012	115	1-5	6	100	9,9	7-9	
332026	115	1-5	7,5	80	12,4	7-9	
332013	115	1-5	9	66	15,0	7-9	
332014	115	1-5	12	50	19,9	7-9	
332015	115	1-5	15	40	24,9	7-9	
332016	115	1-5	18	33	29,9	7-9	
332017	115	1-5	24	25	39,8	7-9	
332018	115	1-5	2 x 6	2 x 50	2 x 9,9	6-7 / 9-10	
332027	115	1-5	2 x 7,5	2 x 40	2 x 12,5	6-7 / 9-10	
332019	115	1-5	2 x 9	2 x 33	2 x 15,0	6-7 / 9-10	
332020	115	1-5	2 x 12	2 x 25	2 x 19,9	6-7 / 9-10	
332021*	115	1-5	2 x 15	2 x 20	2 x 24,9	6-7 / 9-10	
332022*	115	1-5	2 x 18	2 x 17	2 x 29,9	6-7 / 9-10	
332023*	115	1-5	2 x 24	2 x 12	2 x 39,8	6-7 / 9-10	

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.