


TYPE: **EI30/10,5-ZA**

NOMINAL POWER: **1,0 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Short-circuit proof
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 70 g

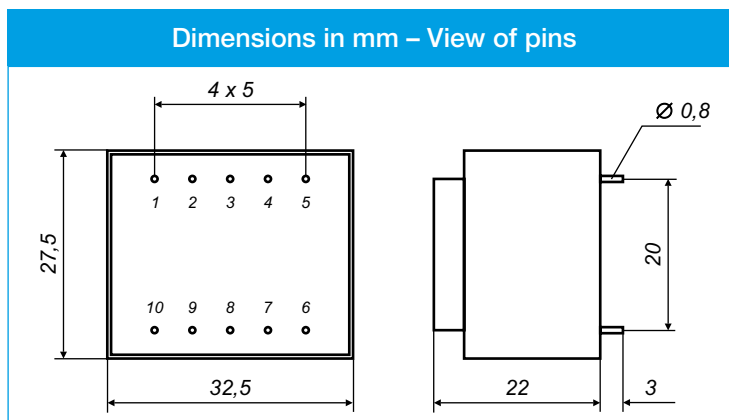

Recommended drill – hole for pins 1,3 mm.

| Art. number | Primary voltage V | Pins | Secondary voltage V | Secondary current mA | No load voltage V | Pins | Empty pins |
|-------------|-------------------|------|---------------------|----------------------|-------------------|------------|------------|
| 321050 | 230 | 1-5 | 6 | 166 | 8,6 | 7-9 | |
| 321051 | 230 | 1-5 | 7,5 | 133 | 10,5 | 7-9 | |
| 321052 | 230 | 1-5 | 9 | 111 | 12,6 | 7-9 | |
| 321054 | 230 | 1-5 | 12 | 84 | 16,8 | 7-9 | |
| 321056 | 230 | 1-5 | 15 | 66 | 21,0 | 7-9 | |
| 321058 | 230 | 1-5 | 18 | 55 | 25,2 | 7-9 | |
| 321060 | 230 | 1-5 | 24 | 42 | 34,7 | 7-9 | |
| 321070 | 230 | 1-5 | 2 x 6 | 2 x 84 | 2 x 8,4 | 6-7 / 9-10 | |
| 321071 | 230 | 1-5 | 2 x 7,5 | 2 x 66 | 2 x 10,5 | 6-7 / 9-10 | |
| 321072 | 230 | 1-5 | 2 x 9 | 2 x 55 | 2 x 12,6 | 6-7 / 9-10 | |
| 321074 | 230 | 1-5 | 2 x 12 | 2 x 42 | 2 x 17,4 | 6-7 / 9-10 | |
| 321076 | 230 | 1-5 | 2 x 15 | 2 x 33 | 2 x 21,3 | 6-7 / 9-10 | |
| 321078* | 230 | 1-5 | 2 x 18 | 2 x 28 | 2 x 24,2 | 6-7 / 9-10 | |
| 321080* | 230 | 1-5 | 2 x 24 | 2 x 21 | 2 x 32,1 | 6-7 / 9-10 | |
| 321081 | 115 | 1-5 | 6 | 166 | 8,6 | 7-9 | |
| 321082 | 115 | 1-5 | 7,5 | 133 | 10,5 | 7-9 | |
| 330299 | 115 | 1-5 | 9 | 111 | 12,6 | 7-9 | |
| 330278 | 115 | 1-5 | 12 | 84 | 16,8 | 7-9 | |
| 321085 | 115 | 1-5 | 15 | 66 | 21,0 | 7-9 | |
| 321086 | 115 | 1-5 | 18 | 55 | 25,2 | 7-9 | |
| 321087 | 115 | 1-5 | 24 | 42 | 34,7 | 7-9 | |
| 321088 | 115 | 1-5 | 2 x 6 | 2 x 84 | 2 x 8,4 | 6-7 / 9-10 | |
| 321089 | 115 | 1-5 | 2 x 7,5 | 2 x 66 | 2 x 10,5 | 6-7 / 9-10 | |
| 321090 | 115 | 1-5 | 2 x 9 | 2 x 55 | 2 x 12,6 | 6-7 / 9-10 | |
| 321091 | 115 | 1-5 | 2 x 12 | 2 x 42 | 2 x 17,4 | 6-7 / 9-10 | |
| 321092 | 115 | 1-5 | 2 x 15 | 2 x 33 | 2 x 21,3 | 6-7 / 9-10 | |
| 321093* | 115 | 1-5 | 2 x 18 | 2 x 28 | 2 x 24,2 | 6-7 / 9-10 | |
| 321094* | 115 | 1-5 | 2 x 24 | 2 x 21 | 2 x 32,1 | 6-7 / 9-10 | |

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.