


TYPE: **EI30/10,5-ZA**

NOMINAL POWER: **1,5 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Short-circuit proof
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 70 g

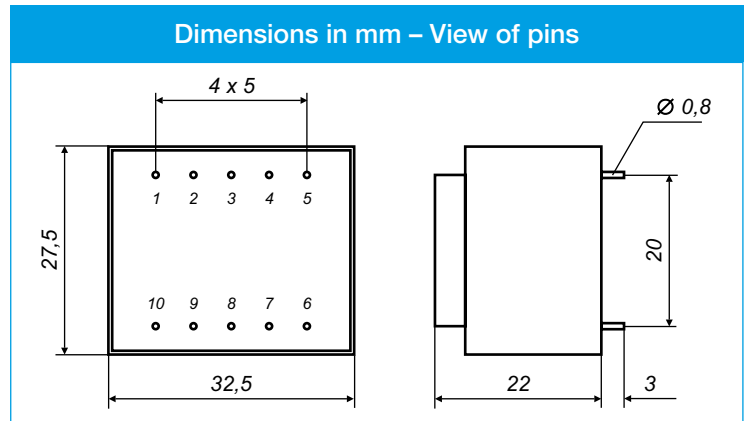

**Recommended drill – hole for pins 1,3 mm.**

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins
321040	230	1-5	6	250	11,1	7-9	
321041	230	1-5	7,5	200	13,9	7-9	
330926	230	1-5	9	166	15,7	7-9	
321042	230	1-5	12	125	20,8	7-9	
321043	230	1-5	15	100	25,7	7-9	
321044	230	1-5	18	83	32,4	7-9	
321045	230	1-5	24	62	43,8	7-9	
321046	230	1-5	2 x 6	2 x 125	2 x 10,7	6-7 / 9-10	
321047	230	1-5	2 x 7,5	2 x 100	2 x 13,4	6-7 / 9-10	
321048	230	1-5	2 x 9	2 x 83	2 x 15,7	6-7 / 9-10	
321049	230	1-5	2 x 12	2 x 62	2 x 22,5	6-7 / 9-10	
321241	230	1-5	2 x 15	2 x 50	2 x 25,0	6-7 / 9-10	
321242	230	1-5	2 x 18	2 x 41	2 x 32,5	6-7 / 9-10	
321243	230	1-5	2 x 24	2 x 31	2 x 44,0	6-7 / 9-10	
321244	115	1-5	6	250	11,1	7-9	
321245	115	1-5	7,5	200	13,9	7-9	
321246	115	1-5	9	166	15,7	7-9	
321247	115	1-5	12	125	20,8	7-9	
321248	115	1-5	15	100	25,7	7-9	
321249	115	1-5	18	83	32,4	7-9	
321280	115	1-5	24	62	43,8	7-9	
321281	115	1-5	2 x 6	2 x 125	2 x 10,7	6-7 / 9-10	
321282	115	1-5	2 x 7,5	2 x 100	2 x 13,4	6-7 / 9-10	
321283	115	1-5	2 x 9	2 x 83	2 x 15,7	6-7 / 9-10	
321284	115	1-5	2 x 12	2 x 62	2 x 22,5	6-7 / 9-10	
321285	115	1-5	2 x 15	2 x 50	2 x 25,0	6-7 / 9-10	
321286	115	1-5	2 x 18	2 x 41	2 x 32,5	6-7 / 9-10	
321287	115	1-5	2 x 24	2 x 31	2 x 44,0	6-7 / 9-10	

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

\* Note: Product not according to EN 61558-2-6.