


TYPE: **EI30/12,5-ZA**

NOMINAL POWER: **1,5 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Short-circuit proof
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 80 g

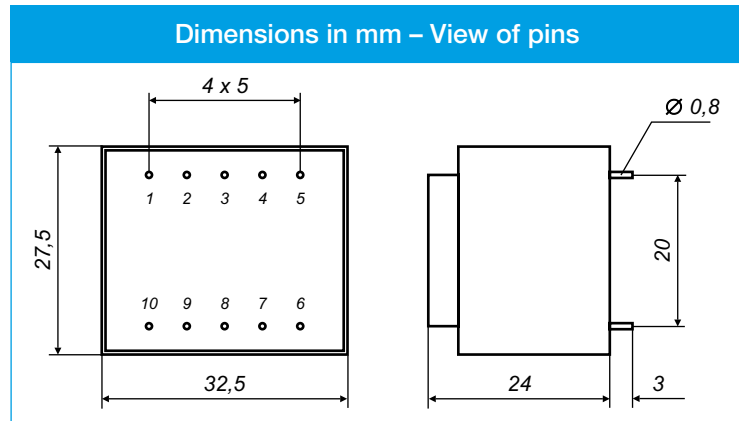

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins
321133	230	1-5	6	250	9,7	7-9	
330479	230	1-5	7,5	200	12,0	7-9	
321134	230	1-5	9	166	14,0	7-9	
330107	230	1-5	12	125	19,3	7-9	
330296	230	1-5	15	100	23,4	7-9	
321137	230	1-5	18	83	29,7	7-9	
321138	230	1-5	24	62	36,8	7-9	
321139	230	1-5	2 x 6	2 x 125	2 x 9,6	6-7 / 9-10	
330480	230	1-5	2 x 7,5	2 x 100	2 x 11,7	6-7 / 9-10	
321140	230	1-5	2 x 9	2 x 83	2 x 14,9	6-7 / 9-10	
321141	230	1-5	2 x 12	2 x 62	2 x 19,3	6-7 / 9-10	
321142	230	1-5	2 x 15	2 x 50	2 x 24,2	6-7 / 9-10	
330512*	230	1-5	2 x 18	2 x 42	2 x 29,4	6-7 / 9-10	
330513*	230	1-5	2 x 24	2 x 31	2 x 35,8	6-7 / 9-10	
331059	115	1-5	6	250	9,7	7-9	
331060	115	1-5	7,5	200	12,0	7-9	
331061	115	1-5	9	166	14,0	7-9	
331062	115	1-5	12	125	19,3	7-9	
331063	115	1-5	15	100	23,4	7-9	
331064	115	1-5	18	83	29,7	7-9	
331072	115	1-5	24	62	36,8	7-9	
331065	115	1-5	2 x 6	2 x 125	2 x 9,6	6-7 / 9-10	
331066	115	1-5	2 x 7,5	2 x 100	2 x 11,7	6-7 / 9-10	
331067	115	1-5	2 x 9	2 x 83	2 x 14,9	6-7 / 9-10	
331068	115	1-5	2 x 12	2 x 62	2 x 19,3	6-7 / 9-10	
331069	115	1-5	2 x 15	2 x 50	2 x 24,2	6-7 / 9-10	
331070*	115	1-5	2 x 18	2 x 42	2 x 29,4	6-7 / 9-10	
331071*	115	1-5	2 x 24	2 x 31	2 x 35,8	6-7 / 9-10	

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.