


**TYPE: EI30/12,5-ZA**

**NOMINAL POWER: 1,8 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Short-circuit proof
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 80 g

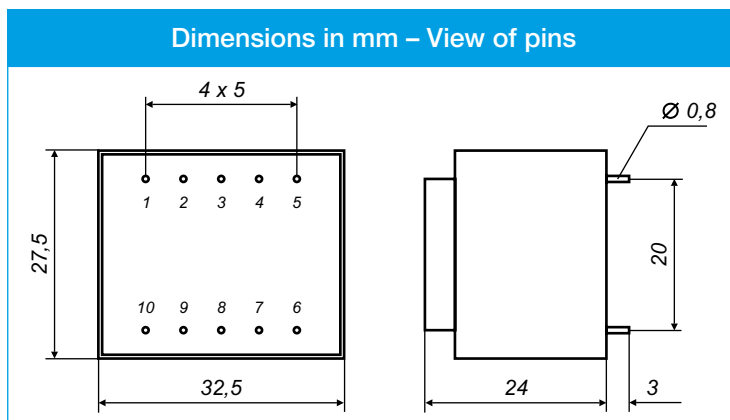

**Recommended drill – hole for pins 1,3 mm.**

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins
322370	230	1-5	6	300	8,9	7-9	
321371	230	1-5	7,5	240	11,1	7-9	
322372	230	1-5	9	200	13,1	7-9	
321373	230	1-5	12	150	17,6	7-9	
322374	230	1-5	15	120	22,4	7-9	
322375	230	1-5	18	100	26,3	7-9	
322376	230	1-5	24	75	34,1	7-9	
322377	230	1-5	2 x 6	2 x 150	2 x 9,1	6-7 / 9-10	
322378	230	1-5	2 x 7,5	2 x 120	2 x 11,5	6-7 / 9-10	
322379	230	1-5	2 x 9	2 x 100	2 x 13,6	6-7 / 9-10	
322380	230	1-5	2 x 12	2 x 75	2 x 17,6	6-7 / 9-10	
322381	230	1-5	2 x 15	2 x 60	2 x 22,3	6-7 / 9-10	
321382	230	1-5	2 x 18	2 x 50	2 x 26,6	6-7 / 9-10	
322383	230	1-5	2 x 24	2 x 37	2 x 35,3	6-7 / 9-10	
322384	115	1-5	6	300	8,9	7-9	
322385	115	1-5	7,5	240	11,1	7-9	
322386	115	1-5	9	200	13,1	7-9	
322387	115	1-5	12	150	17,6	7-9	
322388	115	1-5	15	120	22,4	7-9	
322390	115	1-5	18	100	26,3	7-9	
322391	115	1-5	24	75	34,1	7-9	
322392	115	1-5	2 x 6	2 x 150	2 x 9,1	6-7 / 9-10	
322393	115	1-5	2 x 7,5	2 x 120	2 x 11,5	6-7 / 9-10	
322394	115	1-5	2 x 9	2 x 100	2 x 13,6	6-7 / 9-10	
322395	115	1-5	2 x 12	2 x 75	2 x 17,6	6-7 / 9-10	
322396	115	1-5	2 x 15	2 x 60	2 x 22,3	6-7 / 9-10	
322397	115	1-5	2 x 18	2 x 50	2 x 26,6	6-7 / 9-10	
322398	115	1-5	2 x 24	2 x 37	2 x 35,3	6-7 / 9-10	

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

\* Note: Product not according to EN 61558-2-6.