


TYPE: **EI30/15,5-ZA**

NOMINAL POWER: **2,0 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Short-circuit proof
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 100 g

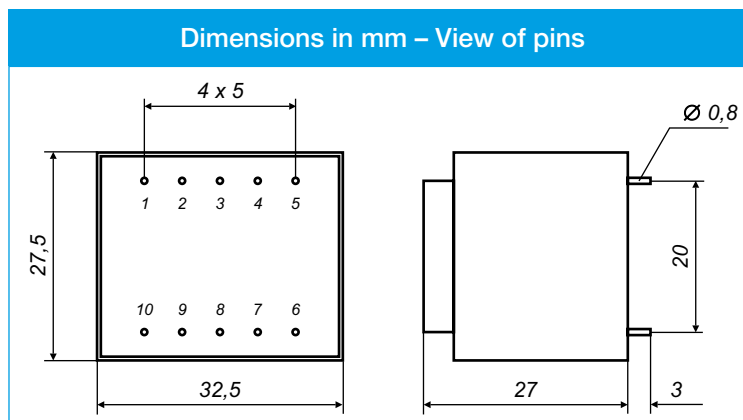

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins
330379	230	1-5	6	333	10,3	7-9	
330481	230	1-5	7,5	266	12,9	7-9	
321184	230	1-5	9	222	15,5	7-9	
321185	230	1-5	12	166	20,7	7-9	
321186	230	1-5	15	133	25,8	7-9	
321187	230	1-5	18	111	30,8	7-9	
321188	230	1-5	24	83	41,4	7-9	
321189	230	1-5	2 x 6	2 x 166	2 x 10,4	6-7 / 9-10	
330482	230	1-5	2 x 7,5	2 x 133	2 x 12,9	6-7 / 9-10	
330357	230	1-5	2 x 9	2 x 111	2 x 15,4	6-7 / 9-10	
321191	230	1-5	2 x 12	2 x 83	2 x 20,7	6-7 / 9-10	
321192	230	1-5	2 x 15	2 x 66	2 x 24,5	6-7 / 9-10	
330514*	230	1-5	2 x 18	2 x 56	2 x 29,1	6-7 / 9-10	
330515*	230	1-5	2 x 24	2 x 42	2 x 36,5	6-7 / 9-10	
321190	115	1-5	6	333	10,3	7-9	
321193	115	1-5	7,5	266	12,9	7-9	
321194	115	1-5	9	222	15,5	7-9	
321195	115	1-5	12	166	20,7	7-9	
321196	115	1-5	15	133	25,8	7-9	
321197	115	1-5	18	111	30,8	7-9	
330522	115	1-5	24	83	41,4	7-9	
321198	115	1-5	2 x 6	2 x 166	2 x 10,4	6-7 / 9-10	
321199	115	1-5	2 x 7,5	2 x 133	2 x 12,9	6-7 / 9-10	
321288	115	1-5	2 x 9	2 x 111	2 x 15,4	6-7 / 9-10	
321289	115	1-5	2 x 12	2 x 83	2 x 20,7	6-7 / 9-10	
321397	115	1-5	2 x 15	2 x 66	2 x 24,5	6-7 / 9-10	
321398*	115	1-5	2 x 18	2 x 56	2 x 29,1	6-7 / 9-10	
321399*	115	1-5	2 x 24	2 x 42	2 x 36,5	6-7 / 9-10	

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.