


TYPE: **EI30/18-ZA**

NOMINAL POWER: **2,3 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Short-circuit proof
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 110 g

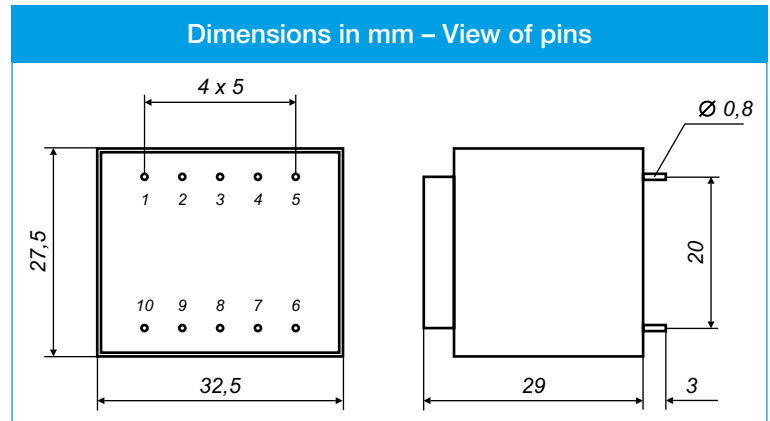

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins
321200	230	1-5	6	383	9,4	7-9	
321201	230	1-5	7,5	306	12,1	7-9	
321202	230	1-5	9	256	14,7	7-9	
321204	230	1-5	12	192	19,0	7-9	
321206	230	1-5	15	153	23,9	7-9	
321208	230	1-5	18	128	29,9	7-9	
321210	230	1-5	24	96	38,3	7-9	
321220	230	1-5	2 x 6	2 x 192	2 x 9,5	6-7 / 9-10	
321221	230	1-5	2 x 7,5	2 x 153	2 x 12,0	6-7 / 9-10	
321222	230	1-5	2 x 9	2 x 128	2 x 15,0	6-7 / 9-10	
321224	230	1-5	2 x 12	2 x 96	2 x 19,2	6-7 / 9-10	
321226	230	1-5	2 x 15	2 x 77	2 x 24,1	6-7 / 9-10	
321228*	230	1-5	2 x 18	2 x 64	2 x 29,3	6-7 / 9-10	
321230*	230	1-5	2 x 24	2 x 48	2 x 35,8	6-7 / 9-10	
321203	115	1-5	6	383	9,4	7-9	
330669	115	1-5	7,5	306	12,1	7-9	
321205	115	1-5	9	256	14,7	7-9	
321207	115	1-5	12	192	19,0	7-9	
330404	115	1-5	15	153	23,9	7-9	
321209	115	1-5	18	128	29,9	7-9	
321211	115	1-5	24	96	38,3	7-9	
321223	115	1-5	2 x 6	2 x 192	2 x 9,5	6-7 / 9-10	
321225	115	1-5	2 x 7,5	2 x 153	2 x 12,0	6-7 / 9-10	
321227	115	1-5	2 x 9	2 x 128	2 x 15,0	6-7 / 9-10	
321229	115	1-5	2 x 12	2 x 96	2 x 19,2	6-7 / 9-10	
321231	115	1-5	2 x 15	2 x 77	2 x 24,1	6-7 / 9-10	
321233*	115	1-5	2 x 18	2 x 64	2 x 29,3	6-7 / 9-10	
321235*	115	1-5	2 x 24	2 x 48	2 x 35,8	6-7 / 9-10	

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.