


TYPE: **EI30/23-ZA**

NOMINAL POWER: **2,8 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Short-circuit proof
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 134 g

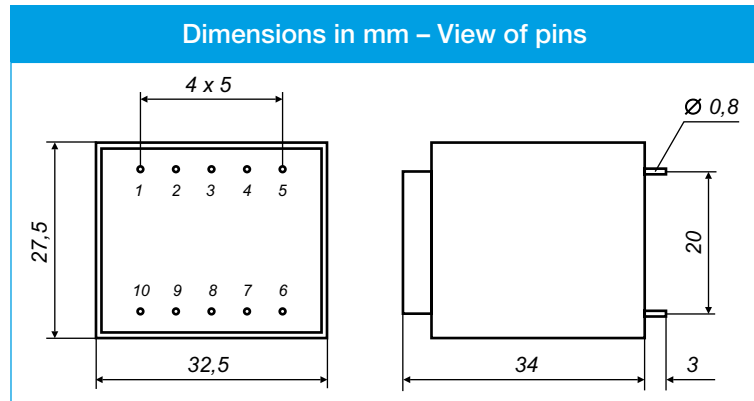

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins
321250	230	1-5	6	466	10,2	7-9	
330483	230	1-5	7,5	373	12,9	7-9	
321251	230	1-5	9	311	14,9	7-9	
321252	230	1-5	12	233	20,1	7-9	
321253	230	1-5	15	186	23,3	7-9	
321254	230	1-5	18	155	29,2	7-9	
321255	230	1-5	24	116	37,8	7-9	
321260	230	1-5	2 x 6	2 x 233	2 x 10,0	6-7 / 9-10	
330484	230	1-5	2 x 7,5	2 x 186	2 x 11,7	6-7 / 9-10	
321261	230	1-5	2 x 9	2 x 155	2 x 14,6	6-7 / 9-10	
321262	230	1-5	2 x 12	2 x 116	2 x 19,6	6-7 / 9-10	
321263	230	1-5	2 x 15	2 x 93	2 x 23,6	6-7 / 9-10	
321264*	230	1-5	2 x 18	2 x 77	2 x 30,0	6-7 / 9-10	
321265*	230	1-5	2 x 24	2 x 58	2 x 38,7	6-7 / 9-10	
321266	115	1-5	6	466	10,2	7-9	
321267	115	1-5	7,5	373	12,9	7-9	
321268	115	1-5	9	311	14,9	7-9	
321269	115	1-5	12	233	20,1	7-9	
321270	115	1-5	15	186	23,3	7-9	
321271	115	1-5	18	155	29,2	7-9	
321272	115	1-5	24	116	37,8	7-9	
321273	115	1-5	2 x 6	2 x 233	2 x 10,0	6-7 / 9-10	
321274	115	1-5	2 x 7,5	2 x 186	2 x 11,7	6-7 / 9-10	
321275	115	1-5	2 x 9	2 x 155	2 x 14,6	6-7 / 9-10	
321276	115	1-5	2 x 12	2 x 116	2 x 19,6	6-7 / 9-10	
321277	115	1-5	2 x 15	2 x 93	2 x 23,6	6-7 / 9-10	
321278*	115	1-5	2 x 18	2 x 77	2 x 30,0	6-7 / 9-10	
321279*	115	1-5	2 x 24	2 x 58	2 x 38,7	6-7 / 9-10	

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.