


TYPE: **EI38/13,6-ZA**

NOMINAL POWER: **3,2 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 155 g

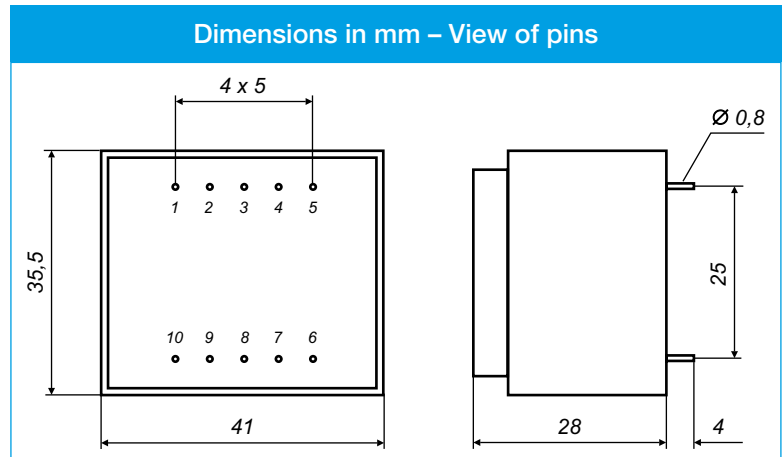

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins	Secondary protection mA
321400	230	1-5	6	534	7,7	7-9	6,10	630
321401	230	1-5	7,5	427	9,5	7-9	6,10	400
321402	230	1-5	9	356	11,6	7-9	6,10	400
321404	230	1-5	12	267	15,3	7-9	6,10	315
321406	230	1-5	15	214	19,3	7-9	6,10	250
321408	230	1-5	18	178	23,2	7-9	6,10	200
321410	230	1-5	24	134	31,3	7-9	6,10	160
321420	230	1-5	2 x 6	2 x 267	2 x 7,7	6-7 / 9-10		2 x 315
321427	230	1-5	2 x 7,5	2 x 214	2 x 9,5	6-7 / 9-10		2 x 200
321422	230	1-5	2 x 9	2 x 178	2 x 11,2	6-7 / 9-10		2 x 200
321424	230	1-5	2 x 12	2 x 134	2 x 15,7	6-7 / 9-10		2 x 160
321426	230	1-5	2 x 15	2 x 107	2 x 19,7	6-7 / 9-10		2 x 125
321428*	230	1-5	2 x 18	2 x 89	2 x 23,5	6-7 / 9-10		2 x 100
321430*	230	1-5	2 x 24	2 x 67	2 x 31,0	6-7 / 9-10		2 x 80
321403	115	1-5	6	534	7,7	7-9	6,10	630
321405	115	1-5	7,5	427	9,5	7-9	6,10	400
330655	115	1-5	9	356	11,6	7-9	6,10	400
321407	115	1-5	12	267	15,3	7-9	6,10	315
321409	115	1-5	15	214	19,3	7-9	6,10	250
321411	115	1-5	18	178	23,2	7-9	6,10	200
321413	115	1-5	24	134	31,3	7-9	6,10	160
321415	115	1-5	2 x 6	2 x 267	2 x 7,7	6-7 / 9-10		2 x 315
321417	115	1-5	2 x 7,5	2 x 214	2 x 9,5	6-7 / 9-10		2 x 200
321419	115	1-5	2 x 9	2 x 178	2 x 11,2	6-7 / 9-10		2 x 200
321421	115	1-5	2 x 12	2 x 134	2 x 15,7	6-7 / 9-10		2 x 160
330847	115	1-5	2 x 15	2 x 107	2 x 19,7	6-7 / 9-10		2 x 125
321423	115	1-5	2 x 18	2 x 89	2 x 23,5	6-7 / 9-10		2 x 100
321425*	115	1-5	2 x 24	2 x 67	2 x 31,0	6-7 / 9-10		2 x 80

Other voltages, currents, pin configurations and temperature classes on request.
Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.