


TYPE: **EI38/13,6-ZA**

NOMINAL POWER: **4,5 VA**

- According to EN 61558-2-6
- Two compartment bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 150 g

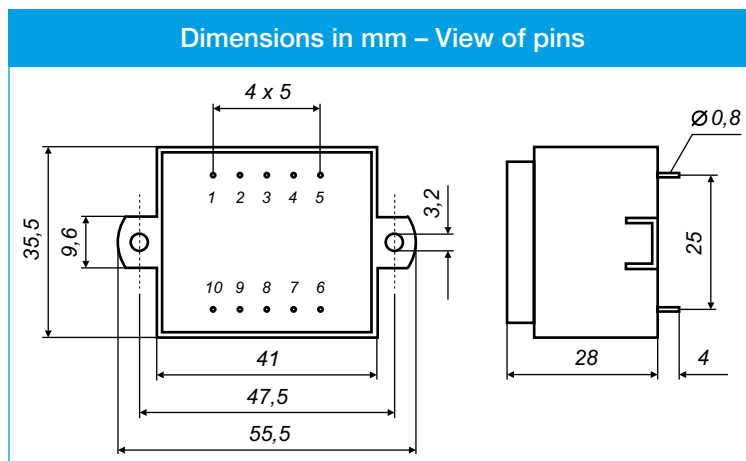

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins	Secondary protection mA
332090	230	1-5	6	750	9,3	7-9	6,10	800
332091	230	1-5	7,5	600	10,9	7-9	6,10	630
332092	230	1-5	9	500	12,7	7-9	6,10	500
332093	230	1-5	12	375	17,4	7-9	6,10	400
332094	230	1-5	15	300	20,9	7-9	6,10	315
332095	230	1-5	18	250	24,2	7-9	6,10	250
332096	230	1-5	24	187	32,6	7-9	6,10	200
332097	230	1-5	2 x 6	2 x 375	2 x 9,3	6-7 / 9-10		2 x 400
332098	230	1-5	2 x 7,5	2 x 300	2 x 10,9	6-7 / 9-10		2 x 315
332099	230	1-5	2 x 9	2 x 250	2 x 13,0	6-7 / 9-10		2 x 250
332100	230	1-5	2 x 12	2 x 187	2 x 17,9	6-7 / 9-10		2 x 200
332101	230	1-5	2 x 15	2 x 150	2 x 19,7	6-7 / 9-10		2 x 160
332102	230	1-5	2 x 18	2 x 125	2 x 21,1	6-7 / 9-10		2 x 125
332103	230	1-5	2 x 24	2 x 93	2 x 28,1	6-7 / 9-10		2 x 100
332110	115	1-5	6	750	9,3	7-9	6,10	800
332111	115	1-5	7,5	600	10,9	7-9	6,10	630
332112	115	1-5	9	500	12,7	7-9	6,10	500
332113	115	1-5	12	375	17,4	7-9	6,10	400
332114	115	1-5	15	300	20,9	7-9	6,10	315
332115	115	1-5	18	250	24,2	7-9	6,10	250
332116	115	1-5	24	187	32,6	7-9	6,10	200
332117	115	1-5	2 x 6	2 x 375	2 x 9,3	6-7 / 9-10		2 x 400
332118	115	1-5	2 x 7,5	2 x 300	2 x 10,9	6-7 / 9-10		2 x 315
332119	115	1-5	2 x 9	2 x 250	2 x 13,0	6-7 / 9-10		2 x 250
332120	115	1-5	2 x 12	2 x 187	2 x 17,9	6-7 / 9-10		2 x 200
332121	115	1-5	2 x 15	2 x 150	2 x 19,7	6-7 / 9-10		2 x 160
332122	115	1-5	2 x 18	2 x 125	2 x 21,1	6-7 / 9-10		2 x 125
332123	115	1-5	2 x 24	2 x 93	2 x 28,1	6-7 / 9-10		2 x 100

Other voltages, currents, pin configurations and temperature classes on request.
Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.