


TYPE: **EI38/13,6-ZA**

NOMINAL POWER: **4,5 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 150 g

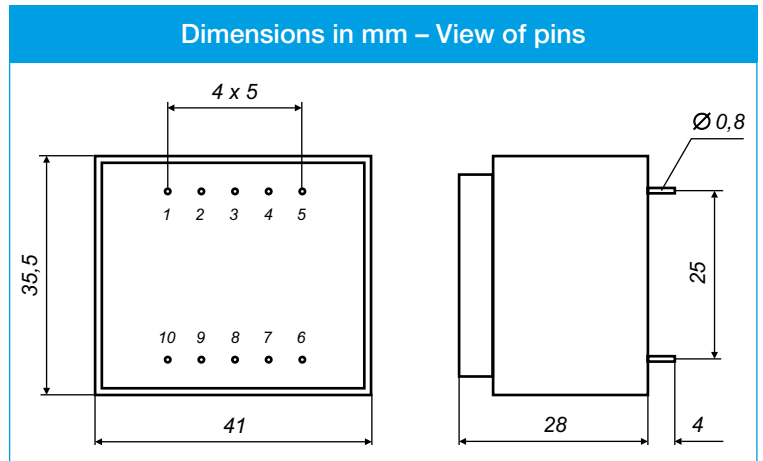

Recommended drill – hole for pins 1,3 mm.

| Art. number | Primary voltage V | Pins | Secondary voltage V | Secondary current mA | No load voltage V | Pins | Empty pins | Secondary protection mA |
|-------------|-------------------|------|---------------------|----------------------|-------------------|------------|------------|-------------------------|
| 321440 | 230 | 1-5 | 6 | 750 | 9,3 | 7-9 | 6,10 | 800 |
| 321441 | 230 | 1-5 | 7,5 | 600 | 10,9 | 7-9 | 6,10 | 630 |
| 321442 | 230 | 1-5 | 9 | 500 | 12,7 | 7-9 | 6,10 | 500 |
| 321443 | 230 | 1-5 | 12 | 375 | 17,4 | 7-9 | 6,10 | 400 |
| 321444 | 230 | 1-5 | 15 | 300 | 20,9 | 7-9 | 6,10 | 315 |
| 321445 | 230 | 1-5 | 18 | 250 | 24,2 | 7-9 | 6,10 | 250 |
| 321446 | 230 | 1-5 | 24 | 187 | 32,6 | 7-9 | 6,10 | 200 |
| 321450 | 230 | 1-5 | 2 x 6 | 2 x 375 | 2 x 9,3 | 6-7 / 9-10 | | 2 x 400 |
| 321451 | 230 | 1-5 | 2 x 7,5 | 2 x 300 | 2 x 10,9 | 6-7 / 9-10 | | 2 x 315 |
| 321452 | 230 | 1-5 | 2 x 9 | 2 x 250 | 2 x 13,0 | 6-7 / 9-10 | | 2 x 250 |
| 321453 | 230 | 1-5 | 2 x 12 | 2 x 187 | 2 x 17,9 | 6-7 / 9-10 | | 2 x 200 |
| 321454 | 230 | 1-5 | 2 x 15 | 2 x 150 | 2 x 19,7 | 6-7 / 9-10 | | 2 x 160 |
| 321455* | 230 | 1-5 | 2 x 18 | 2 x 125 | 2 x 21,1 | 6-7 / 9-10 | | 2 x 125 |
| 321456* | 230 | 1-5 | 2 x 24 | 2 x 93 | 2 x 28,1 | 6-7 / 9-10 | | 2 x 100 |
| 321460 | 115 | 1-5 | 6 | 750 | 9,3 | 7-9 | 6,10 | 800 |
| 321461 | 115 | 1-5 | 7,5 | 600 | 10,9 | 7-9 | 6,10 | 630 |
| 321462 | 115 | 1-5 | 9 | 500 | 12,7 | 7-9 | 6,10 | 500 |
| 321463 | 115 | 1-5 | 12 | 375 | 17,4 | 7-9 | 6,10 | 400 |
| 321464 | 115 | 1-5 | 15 | 300 | 20,9 | 7-9 | 6,10 | 315 |
| 321465 | 115 | 1-5 | 18 | 250 | 24,2 | 7-9 | 6,10 | 250 |
| 321466 | 115 | 1-5 | 24 | 187 | 32,6 | 7-9 | 6,10 | 200 |
| 321467 | 115 | 1-5 | 2 x 6 | 2 x 375 | 2 x 9,3 | 6-7 / 9-10 | | 2 x 400 |
| 321468 | 115 | 1-5 | 2 x 7,5 | 2 x 300 | 2 x 10,9 | 6-7 / 9-10 | | 2 x 315 |
| 321469 | 115 | 1-5 | 2 x 9 | 2 x 250 | 2 x 13,0 | 6-7 / 9-10 | | 2 x 250 |
| 321470 | 115 | 1-5 | 2 x 12 | 2 x 187 | 2 x 17,9 | 6-7 / 9-10 | | 2 x 200 |
| 321471 | 115 | 1-5 | 2 x 15 | 2 x 150 | 2 x 19,7 | 6-7 / 9-10 | | 2 x 160 |
| 321472* | 115 | 1-5 | 2 x 18 | 2 x 125 | 2 x 21,1 | 6-7 / 9-10 | | 2 x 125 |
| 321473* | 115 | 1-5 | 2 x 24 | 2 x 93 | 2 x 28,1 | 6-7 / 9-10 | | 2 x 100 |

Other voltages, currents, pin configurations and temperature classes on request.
Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.