


TYPE: **EI42/14,8-ZA**

NOMINAL POWER: **6,0 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 200 g

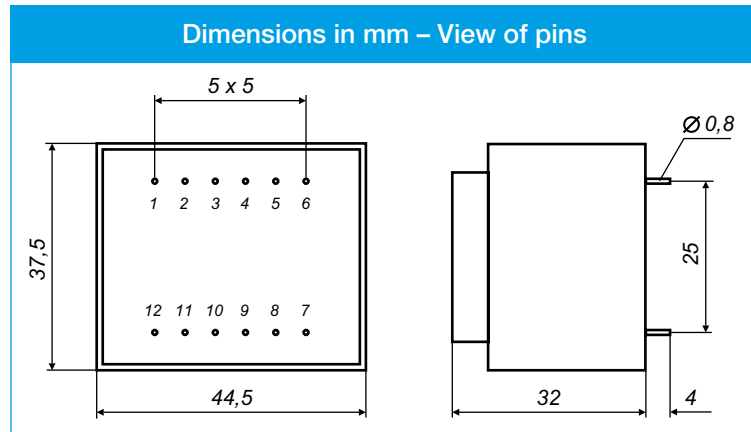

**Recommended drill – hole for pins 1,3 mm.**

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins	Secondary protection mA
321540	230	1-6	6	1000	8,8	8-11	7,12	1000
321541	230	1-6	7,5	800	11,0	8-11	7,12	800
321542	230	1-6	9	666	13,3	8-11	7,12	630
321543	230	1-6	12	500	16,9	8-11	7,12	500
321544	230	1-6	15	400	20,6	8-11	7,12	400
321545	230	1-6	18	333	24,6	8-11	7,12	315
321546	230	1-6	24	250	30,5	8-11	7,12	250
321547	230	1-6	2 x 6	500	2 x 8,8	7-8 / 11-12		2 x 500
321548	230	1-6	2 x 7,5	400	2 x 11,0	7-8 / 11-12		2 x 400
321549	230	1-6	2 x 9	333	2 x 13,3	7-8 / 11-12		2 x 315
321550	230	1-6	2 x 12	250	2 x 16,9	7-8 / 11-12		2 x 250
321551	230	1-6	2 x 15	200	2 x 20,6	7-8 / 11-12		2 x 200
321552*	230	1-6	2 x 18	166	2 x 24,6	7-8 / 11-12		2 x 160
321553*	230	1-6	2 x 24	125	2 x 30,5	7-8 / 11-12		2 x 125
321560	115	1-6	6	1000	8,8	8-11	7,12	1000
321561	115	1-6	7,5	800	11,0	8-11	7,12	800
321562	115	1-6	9	666	13,3	8-11	7,12	630
321563	115	1-6	12	500	16,9	8-11	7,12	500
321564	115	1-6	15	400	20,6	8-11	7,12	400
321565	115	1-6	18	333	24,6	8-11	7,12	315
321566	115	1-6	24	250	30,5	8-11	7,12	250
321567	115	1-6	2 x 6	500	2 x 8,8	7-8 / 11-12		2 x 500
321568	115	1-6	2 x 7,5	400	2 x 11,0	7-8 / 11-12		2 x 400
321569	115	1-6	2 x 9	333	2 x 13,3	7-8 / 11-12		2 x 315
321570	115	1-6	2 x 12	250	2 x 16,9	7-8 / 11-12		2 x 250
321571	115	1-6	2 x 15	200	2 x 20,6	7-8 / 11-12		2 x 200
321572*	115	1-6	2 x 18	166	2 x 24,6	7-8 / 11-12		2 x 160
321573*	115	1-6	2 x 24	125	2 x 30,5	7-8 / 11-12		2 x 125

Other voltages, currents, pin configurations and temperature classes on request.  
Specifications subject to change without notice.

\* Note: Product not according to EN 61558-2-6.