


TYPE: **EI42/20,5-ZA**

NOMINAL POWER: **8,0 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 252 g

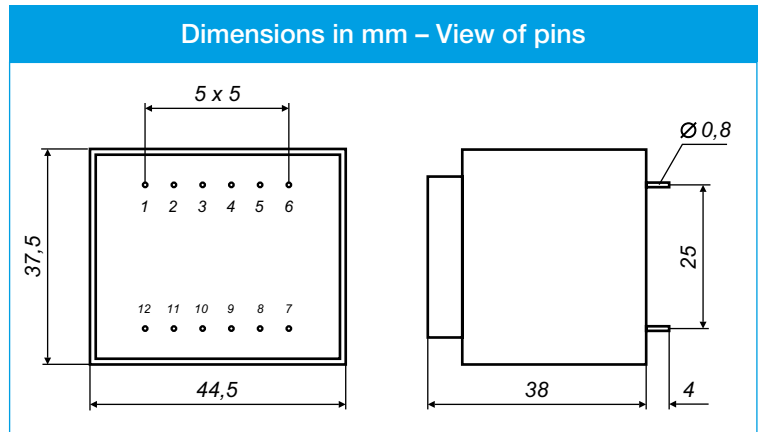

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins	Secondary protection mA
331160	230	1-6	6	1333	7,8	8-11	7,12	1250
332351	230	1-6	7,5	1066	9,8	8-11	7,12	1000
330903	230	1-6	9	888	11,9	8-11	7,12	800
332353	230	1-6	12	666	15,8	8-11	7,12	700
330843	230	1-6	15	533	19,7	8-11	7,12	500
332355	230	1-6	18	444	23,5	8-11	7,12	400
332356	230	1-6	24	333	31,4	8-11	7,12	315
330995	230	1-6	2 x 6	2 x 666	2 x 7,8	7-8 / 11-12		2 x 700
332358	230	1-6	2 x 7,5	2 x 533	2 x 9,8	7-8 / 11-12		2 x 500
330703	230	1-6	2 x 9	2 x 444	2 x 11,9	7-8 / 11-12		2 x 400
332360	230	1-6	2 x 12	2 x 333	2 x 15,8	7-8 / 11-12		2 x 315
330813	230	1-6	2 x 15	2 x 266	2 x 19,7	7-8 / 11-12		2 x 250
332362	230	1-6	2 x 18	2 x 222	2 x 23,5	7-8 / 11-12		2 x 200
332363	230	1-6	2 x 24	2 x 166	2 x 31,4	7-8 / 11-12		2 x 150
332370	115	1-6	6	1333	7,8	8-11	7,12	1250
332371	115	1-6	7,5	1066	9,8	8-11	7,12	1000
332372	115	1-6	9	888	11,9	8-11	7,12	800
332373	115	1-6	12	666	15,8	8-11	7,12	700
332374	115	1-6	15	533	19,7	8-11	7,12	500
332375	115	1-6	18	444	23,5	8-11	7,12	400
332376	115	1-6	24	333	31,4	8-11	7,12	315
332377	115	1-6	2 x 6	2 x 666	2 x 7,8	7-8 / 11-12		2 x 700
332378	115	1-6	2 x 7,5	2 x 533	2 x 9,8	7-8 / 11-12		2 x 500
332379	115	1-6	2 x 9	2 x 444	2 x 11,9	7-8 / 11-12		2 x 400
332380	115	1-6	2 x 12	2 x 333	2 x 15,8	7-8 / 11-12		2 x 315
332381	115	1-6	2 x 15	2 x 266	2 x 19,7	7-8 / 11-12		2 x 250
332382	115	1-6	2 x 18	2 x 222	2 x 23,5	7-8 / 11-12		2 x 200
332383	115	1-6	2 x 24	2 x 166	2 x 31,4	7-8 / 11-12		2 x 150

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.*