


TYPE: EI48/16,8-ZA

NOMINAL POWER: 10,0 VA

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 300 g

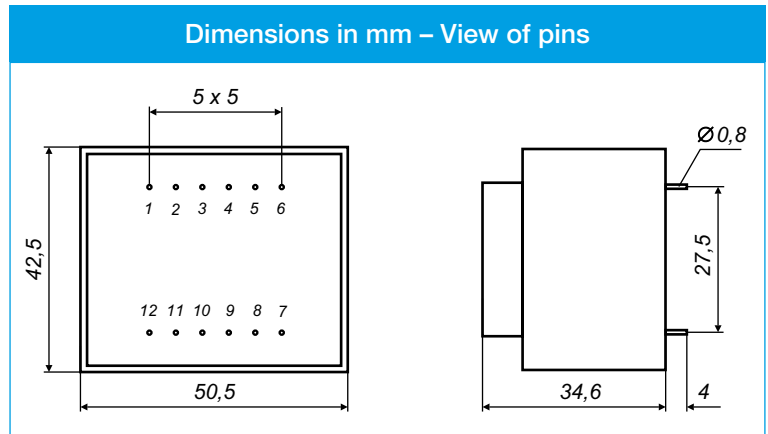

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins	Secondary protection mA
321670	230	1-6	6	1666	7,5	8-11	7,12	63
321671	230	1-6	7,5	1333	9,4	8-11	7,12	63
321672	230	1-6	9	1111	11,4	8-11	7,12	63
321673	230	1-6	12	834	15,2	8-11	7,12	63
321674	230	1-6	15	666	18,9	8-11	7,12	63
321675	230	1-6	18	555	22,6	8-11	7,12	63
321676	230	1-6	24	416	30,2	8-11	7,12	63
321677	230	1-6	2 x 6	2 x 834	2 x 7,6	7-8 / 11-12		63
321678	230	1-6	2 x 7,5	2 x 666	2 x 9,5	7-8 / 11-12		63
321679	230	1-6	2 x 9	2 x 555	2 x 11,3	7-8 / 11-12		63
321680	230	1-6	2 x 12	2 x 416	2 x 15,1	7-8 / 11-12		63
321681	230	1-6	2 x 15	2 x 333	2 x 19,0	7-8 / 11-12		63
321682	230	1-6	2 x 18	2 x 277	2 x 22,6	7-8 / 11-12		63
321683*	230	1-6	2 x 24	2 x 208	2 x 29,0	7-8 / 11-12		63
321684	115	1-6	6	1666	7,5	8-11	7,12	125
321685	115	1-6	7,5	1333	9,4	8-11	7,12	125
321686	115	1-6	9	1111	11,4	8-11	7,12	125
321687	115	1-6	12	834	15,2	8-11	7,12	125
321688	115	1-6	15	666	18,9	8-11	7,12	125
321689	115	1-6	18	555	22,6	8-11	7,12	125
321690	115	1-6	24	416	30,2	8-11	7,12	125
321691	115	1-6	2 x 6	2 x 834	2 x 7,6	7-8 / 11-12		125
321692	115	1-6	2 x 7,5	2 x 666	2 x 9,5	7-8 / 11-12		125
321693	115	1-6	2 x 9	2 x 555	2 x 11,3	7-8 / 11-12		125
321694	115	1-6	2 x 12	2 x 416	2 x 15,1	7-8 / 11-12		125
321695	115	1-6	2 x 15	2 x 333	2 x 19,0	7-8 / 11-12		125
321696	115	1-6	2 x 18	2 x 277	2 x 22,6	7-8 / 11-12		125
321697*	115	1-6	2 x 24	2 x 208	2 x 29,0	7-8 / 11-12		125

Other voltages, currents, pin configurations and temperature classes on request.
Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.