


TYPE: **EI48/16,8-ZA**

NOMINAL POWER: **10,0 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 300 g

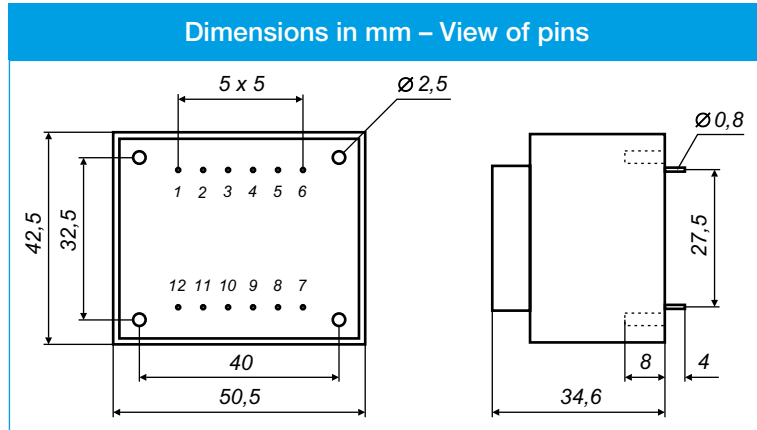

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins	Secondary protection mA
321601	230	1-6	6	1666	7,5	8-11	7,12	63
321616	230	1-6	7,5	1333	9,4	8-11	7,12	63
321603	230	1-6	9	1111	11,4	8-11	7,12	63
321605	230	1-6	12	834	15,2	8-11	7,12	63
321607	230	1-6	15	666	18,9	8-11	7,12	63
321609	230	1-6	18	555	22,6	8-11	7,12	63
321611	230	1-6	24	416	30,2	8-11	7,12	63
321621	230	1-6	2 x 6	2 x 834	2 x 7,6	7-8 / 11-12		63
321617	230	1-6	2 x 7,5	2 x 666	2 x 9,5	7-8 / 11-12		63
321623	230	1-6	2 x 9	2 x 555	2 x 11,3	7-8 / 11-12		63
321625	230	1-6	2 x 12	2 x 416	2 x 15,1	7-8 / 11-12		63
321627	230	1-6	2 x 15	2 x 333	2 x 19,0	7-8 / 11-12		63
321629	230	1-6	2 x 18	2 x 277	2 x 22,6	7-8 / 11-12		63
321631*	230	1-6	2 x 24	2 x 208	2 x 29,0	7-8 / 11-12		63
321641	115	1-6	6	1666	7,5	8-11	7,12	125
321618	115	1-6	7,5	1333	9,4	8-11	7,12	125
321643	115	1-6	9	1111	11,4	8-11	7,12	125
321645	115	1-6	12	834	15,2	8-11	7,12	125
321647	115	1-6	15	666	18,9	8-11	7,12	125
321649	115	1-6	18	555	22,6	8-11	7,12	125
321651	115	1-6	24	416	30,2	8-11	7,12	125
321663	115	1-6	2 x 6	2 x 834	2 x 7,6	7-8 / 11-12		125
321619	115	1-6	2 x 7,5	2 x 666	2 x 9,5	7-8 / 11-12		125
321653	115	1-6	2 x 9	2 x 555	2 x 11,3	7-8 / 11-12		125
321655	115	1-6	2 x 12	2 x 416	2 x 15,1	7-8 / 11-12		125
321657	115	1-6	2 x 15	2 x 333	2 x 19,0	7-8 / 11-12		125
321659	115	1-6	2 x 18	2 x 277	2 x 22,6	7-8 / 11-12		125
321661*	115	1-6	2 x 24	2 x 208	2 x 29,0	7-8 / 11-12		125

Other voltages, currents, pin configurations and temperature classes on request.
Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.