


TYPE: **EI48/20,5-ZA**

NOMINAL POWER: **12,0 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 340 g

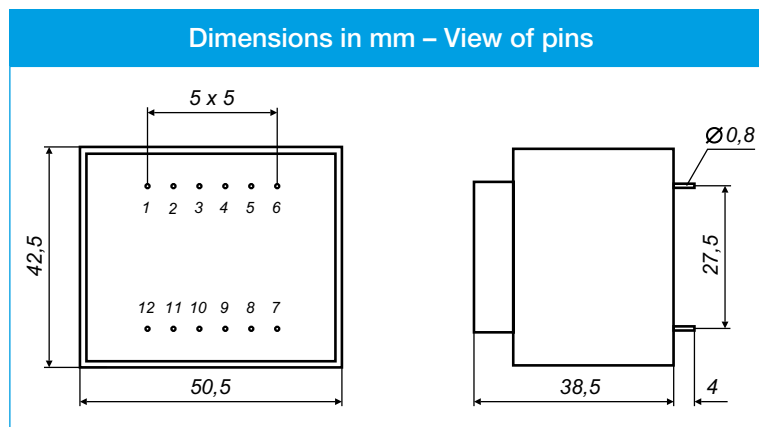

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins	Secondary protection mA
332480	230	1-6	6	2000	7,5	8-11	7,12	2000
332481	230	1-6	7,5	1600	9,4	8-11	7,12	1600
332482	230	1-6	9	1333	11,4	8-11	7,12	1250
332483	230	1-6	12	1000	15,2	8-11	7,12	1000
332484	230	1-6	15	800	18,9	8-11	7,12	800
332485	230	1-6	18	666	22,6	8-11	7,12	630
332486	230	1-6	24	500	30,2	8-11	7,12	500
332487	230	1-6	2 x 6	2 x 1000	2 x 7,6	7-8 / 11-12		2 x 1000
332488	230	1-6	2 x 7,5	2 x 800	2 x 9,5	7-8 / 11-12		2 x 800
332489	230	1-6	2 x 9	2 x 666	2 x 11,3	7-8 / 11-12		2 x 630
332490	230	1-6	2 x 12	2 x 500	2 x 15,1	7-8 / 11-12		2 x 500
332491	230	1-6	2 x 15	2 x 400	2 x 19,0	7-8 / 11-12		2 x 400
332492	230	1-6	2 x 18	2 x 333	2 x 22,6	7-8 / 11-12		2 x 315
332493	230	1-6	2 x 24	2 x 250	2 x 29,0	7-8 / 11-12		2 x 250
332500	115	1-6	6	2000	7,5	8-11	7,12	2000
332501	115	1-6	7,5	1600	9,4	8-11	7,12	1600
332502	115	1-6	9	1333	11,4	8-11	7,12	1250
332503	115	1-6	12	1000	15,2	8-11	7,12	1000
332504	115	1-6	15	800	18,9	8-11	7,12	800
332505	115	1-6	18	666	22,6	8-11	7,12	630
332506	115	1-6	24	500	30,2	8-11	7,12	500
332507	115	1-6	2 x 6	2 x 1000	2 x 7,6	7-8 / 11-12		2 x 1000
332508	115	1-6	2 x 7,5	2 x 800	2 x 9,5	7-8 / 11-12		2 x 800
332509	115	1-6	2 x 9	2 x 666	2 x 11,3	7-8 / 11-12		2 x 630
332510	115	1-6	2 x 12	2 x 500	2 x 15,1	7-8 / 11-12		2 x 500
332511	115	1-6	2 x 15	2 x 400	2 x 19,0	7-8 / 11-12		2 x 400
332512	115	1-6	2 x 18	2 x 333	2 x 22,6	7-8 / 11-12		2 x 315
332513	115	1-6	2 x 24	2 x 250	2 x 29,0	7-8 / 11-12		2 x 250

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.