


TYPE: EI48/20,5-ZA

NOMINAL POWER: 12,0 VA

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 340 g

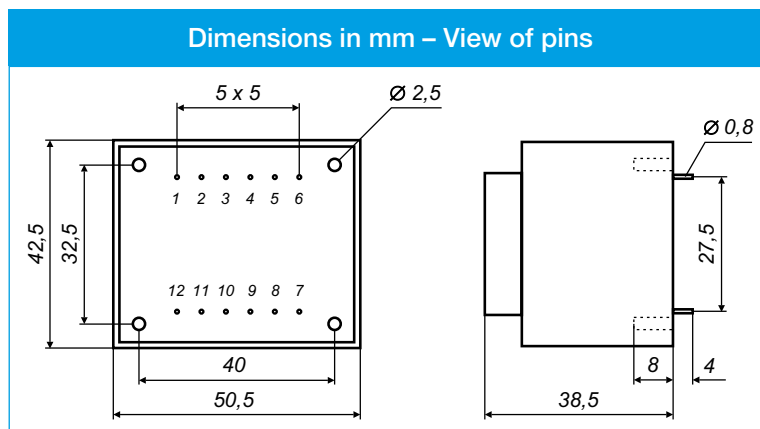

Recommended drill – hole for pins 1,3 mm.

| Art. number | Primary voltage V | Pins | Secondary voltage V | Secondary current mA | No load voltage V | Pins | Empty pins | Secondary protection mA |
|-------------|-------------------|------|---------------------|----------------------|-------------------|-------------|------------|-------------------------|
| 332440 | 230 | 1-6 | 6 | 2000 | 7,5 | 8-11 | 7,12 | 2000 |
| 332441 | 230 | 1-6 | 7,5 | 1600 | 9,4 | 8-11 | 7,12 | 1600 |
| 332442 | 230 | 1-6 | 9 | 1333 | 11,4 | 8-11 | 7,12 | 1250 |
| 332443 | 230 | 1-6 | 12 | 1000 | 15,2 | 8-11 | 7,12 | 1000 |
| 332444 | 230 | 1-6 | 15 | 800 | 18,9 | 8-11 | 7,12 | 800 |
| 332445 | 230 | 1-6 | 18 | 666 | 22,6 | 8-11 | 7,12 | 630 |
| 332446 | 230 | 1-6 | 24 | 500 | 30,2 | 8-11 | 7,12 | 500 |
| 332447 | 230 | 1-6 | 2 x 6 | 2 x 1000 | 2 x 7,6 | 7-8 / 11-12 | | 2 x 1000 |
| 332448 | 230 | 1-6 | 2 x 7,5 | 2 x 800 | 2 x 9,5 | 7-8 / 11-12 | | 2 x 800 |
| 332449 | 230 | 1-6 | 2 x 9 | 2 x 666 | 2 x 11,3 | 7-8 / 11-12 | | 2 x 630 |
| 332450 | 230 | 1-6 | 2 x 12 | 2 x 500 | 2 x 15,1 | 7-8 / 11-12 | | 2 x 500 |
| 332451 | 230 | 1-6 | 2 x 15 | 2 x 400 | 2 x 19,0 | 7-8 / 11-12 | | 2 x 400 |
| 332452 | 230 | 1-6 | 2 x 18 | 2 x 333 | 2 x 22,6 | 7-8 / 11-12 | | 2 x 315 |
| 332453 | 230 | 1-6 | 2 x 24 | 2 x 250 | 2 x 29,0 | 7-8 / 11-12 | | 2 x 250 |
| 332460 | 115 | 1-6 | 6 | 2000 | 7,5 | 8-11 | 7,12 | 2000 |
| 332461 | 115 | 1-6 | 7,5 | 1600 | 9,4 | 8-11 | 7,12 | 1600 |
| 332462 | 115 | 1-6 | 9 | 1333 | 11,4 | 8-11 | 7,12 | 1250 |
| 332463 | 115 | 1-6 | 12 | 1000 | 15,2 | 8-11 | 7,12 | 1000 |
| 332464 | 115 | 1-6 | 15 | 800 | 18,9 | 8-11 | 7,12 | 800 |
| 332465 | 115 | 1-6 | 18 | 666 | 22,6 | 8-11 | 7,12 | 630 |
| 332466 | 115 | 1-6 | 24 | 500 | 30,2 | 8-11 | 7,12 | 500 |
| 332467 | 115 | 1-6 | 2 x 6 | 2 x 1000 | 2 x 7,6 | 7-8 / 11-12 | | 2 x 1000 |
| 332468 | 115 | 1-6 | 2 x 7,5 | 2 x 800 | 2 x 9,5 | 7-8 / 11-12 | | 2 x 800 |
| 332469 | 115 | 1-6 | 2 x 9 | 2 x 666 | 2 x 11,3 | 7-8 / 11-12 | | 2 x 630 |
| 332470 | 115 | 1-6 | 2 x 12 | 2 x 500 | 2 x 15,1 | 7-8 / 11-12 | | 2 x 500 |
| 332471 | 115 | 1-6 | 2 x 15 | 2 x 400 | 2 x 19,0 | 7-8 / 11-12 | | 2 x 400 |
| 332472 | 115 | 1-6 | 2 x 18 | 2 x 333 | 2 x 22,6 | 7-8 / 11-12 | | 2 x 315 |
| 332473 | 115 | 1-6 | 2 x 24 | 2 x 250 | 2 x 29,0 | 7-8 / 11-12 | | 2 x 250 |

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.