


TYPE: **EI54/18,8-ZA**

NOMINAL POWER: **16 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 430 g

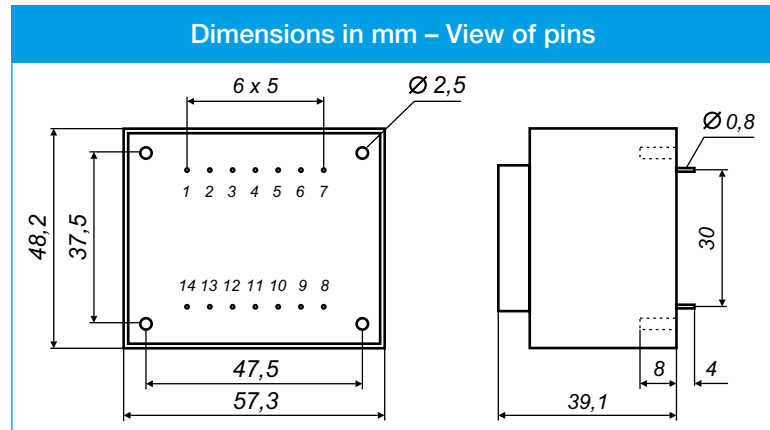

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins	Secondary protection mA
321740	230	1-7	6	2666	7,4	9-13	8,14	2,5
321741	230	1-7	7,5	2133	9,3	9-13	8,14	2,0
321742	230	1-7	9	1777	11,1	9-13	8,14	2,0
321743	230	1-7	12	1333	14,7	9-13	8,14	1,25
321744	230	1-7	15	1066	18,4	9-13	8,14	1
321745	230	1-7	18	888	22,1	9-13	8,14	1
321746	230	1-7	24	666	29,3	9-13	8,14	0,63
321747	230	1-7	2 x 6	2 x 1333	2 x 7,4	8-9 / 13-14		2 x 1
321748	230	1-7	2 x 7,5	2 x 1066	2 x 9,3	8-9 / 13-14		2 x 1,25
321749	230	1-7	2 x 9	2 x 888	2 x 11,1	8-9 / 13-14		2 x 1
321750	230	1-7	2 x 12	2 x 666	2 x 14,7	8-9 / 13-14		2 x 0,63
321751	230	1-7	2 x 15	2 x 533	2 x 18,4	8-9 / 13-14		2 x 0,5
321752	230	1-7	2 x 18	2 x 444	2 x 22	8-9 / 13-14		2 x 0,5
321753*	230	1-7	2 x 24	2 x 333	2 x 29,3	8-9 / 13-14		2 x 0,315
321760	115	1-7	6	2666	7,4	9-13	8,14	2,5
321761	115	1-7	7,5	2133	9,3	9-13	8,14	2,0
321762	115	1-7	9	1777	11,1	9-13	8,14	2,0
321763	115	1-7	12	1333	14,7	9-13	8,14	1,25
321764	115	1-7	15	1066	18,4	9-13	8,14	1
321765	115	1-7	18	888	22,1	9-13	8,14	1
321766	115	1-7	24	666	29,3	9-13	8,14	0,63
321767	115	1-7	2 x 6	2 x 1333	2 x 7,4	8-9 / 13-14		2 x 1
321768	115	1-7	2 x 7,5	2 x 1066	2 x 9,3	8-9 / 13-14		2 x 1,25
321769	115	1-7	2 x 9	2 x 888	2 x 11,1	8-9 / 13-14		2 x 1
321770	115	1-7	2 x 12	2 x 666	2 x 14,7	8-9 / 13-14		2 x 0,63
321771	115	1-7	2 x 15	2 x 533	2 x 18,4	8-9 / 13-14		2 x 0,5
321772	115	1-7	2 x 18	2 x 444	2 x 22	8-9 / 13-14		2 x 0,5
321773*	115	1-7	2 x 24	2 x 333	2 x 29,3	8-9 / 13-14		2 x 0,315

Other voltages, currents, pin configurations and temperature classes on request.
Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.