


TYPE: **EI60/20,6-ZA**

NOMINAL POWER: **22 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 550 g

Dimensions in mm – View of pins

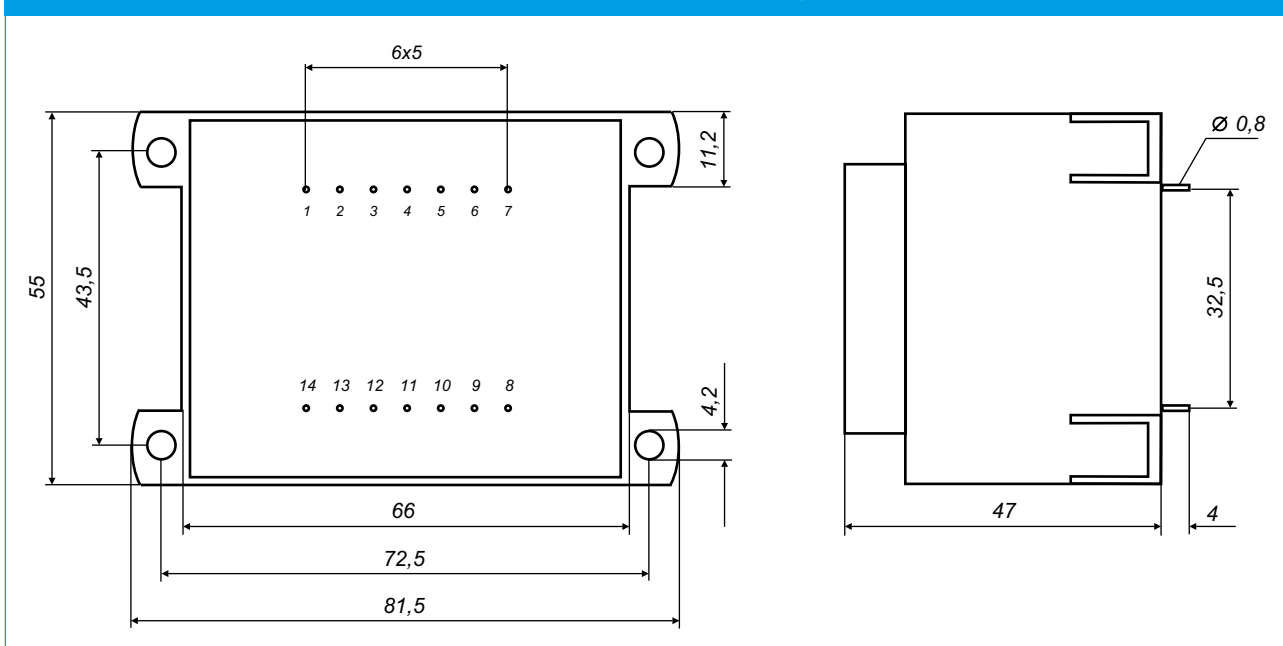

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins	Secondary protection mA
321800	230	1-7	6	3667	7,6	9-13	8,14	4
321832	230	1-7	7,5	2933	9,5	9-13	8,14	3,15
321802	230	1-7	9	2444	11,5	9-13	8,14	2,5
321804	230	1-7	12	1833	15,4	9-13	8,14	2
321806	230	1-7	15	1467	19,2	9-13	8,14	1,5
321808	230	1-7	18	1222	23,0	9-13	8,14	1,25
321810	230	1-7	24	917	30,7	9-13	8,14	1
321820	230	1-7	2 x 6	2 x 1833	2 x 7,6	8-9 / 13-14		2 x 2
321833	230	1-7	2 x 7,5	2 x 1467	2 x 9,6	8-9 / 13-14		2 x 1,5
321822	230	1-7	2 x 9	2 x 1222	2 x 11,5	8-9 / 13-14		2 x 1,25
321824	230	1-7	2 x 12	2 x 917	2 x 15,4	8-9 / 13-14		2 x 1
321826	230	1-7	2 x 15	2 x 733	2 x 19,2	8-9 / 13-14		2 x 0,8
321828	230	1-7	2 x 18	2 x 611	2 x 23,0	8-9 / 13-14		2 x 0,63
321830*	230	1-7	2 x 24	2 x 458	2 x 30,7	8-9 / 13-14		2 x 0,5

Other voltages, currents, pin configurations and temperature classes on request.  
Specifications subject to change without notice.

\* Note: Product not according to EN 61558-2-6.