


TYPE: EI60/25,5-ZA

NOMINAL POWER: 25 VA

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 550 g

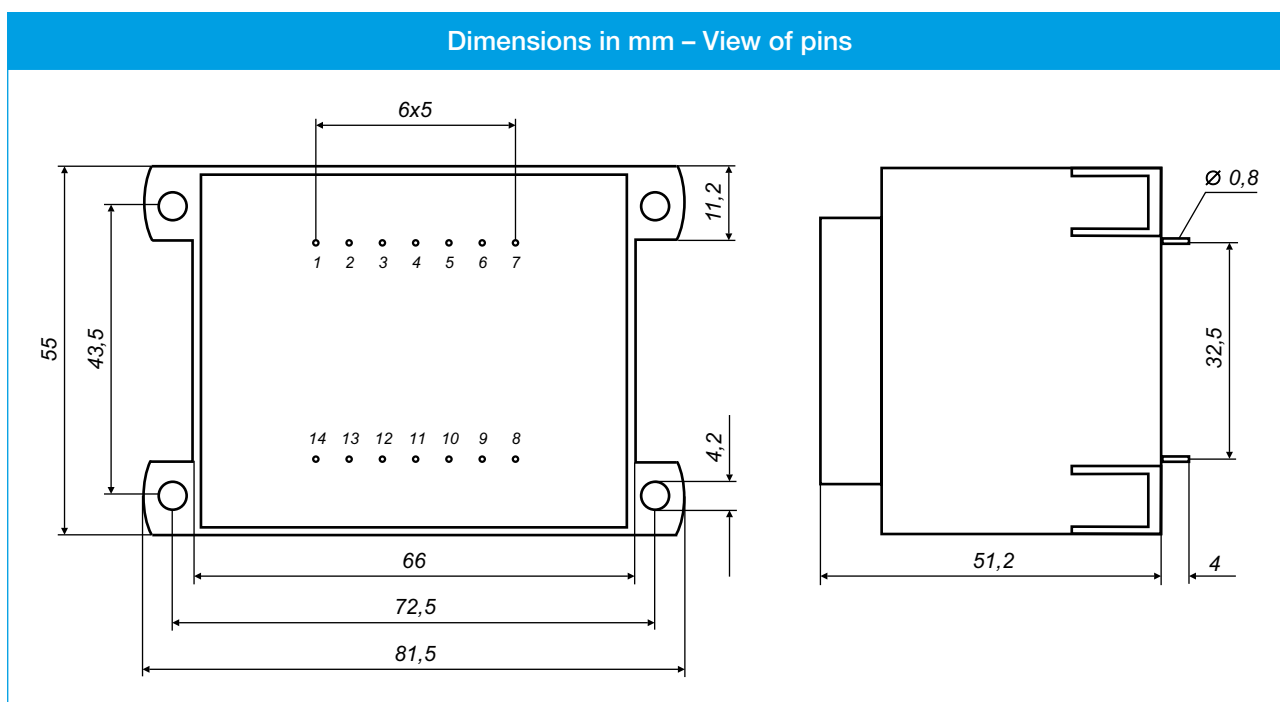

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins	Secondary protection mA
321850	230	1-7	6	4170	7,2	9-13	8,14	4
321834	230	1-7	7,5	3333	9,0	9-13	8,14	3,15
321852	230	1-7	9	2780	10,8	9-13	8,14	3,15
321854	230	1-7	12	2080	14,5	9-13	8,14	2
321856	230	1-7	15	1666	18,0	9-13	8,14	1,6
321858	230	1-7	18	1390	21,6	9-13	8,14	1,6
321860	230	1-7	24	1040	28,8	9-13	8,14	1
321870	230	1-7	2 x 6	2 x 2080	2 x 7,2	8-9 / 13-14		2 x 2
321835	230	1-7	2 x 7,5	2 x 1666	2 x 9,0	8-9 / 13-14		2 x 1,6
321872	230	1-7	2 x 9	2 x 1390	2 x 10,8	8-9 / 13-14		2 x 1,6
321874	230	1-7	2 x 12	2 x 1040	2 x 14,5	8-9 / 13-14		2 x 1
321876	230	1-7	2 x 15	2 x 830	2 x 18,0	8-9 / 13-14		2 x 0,8
321878	230	1-7	2 x 18	2 x 694	2 x 21,6	8-9 / 13-14		2 x 0,63
321880*	230	1-7	2 x 24	2 x 520	2 x 28,8	8-9 / 13-14		2 x 0,5

Other voltages, currents, pin configurations and temperature classes on request.
Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.