


TYPE: **EI60/30,5-ZA**

NOMINAL POWER: **30 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 780 g

Dimensions in mm – View of pins

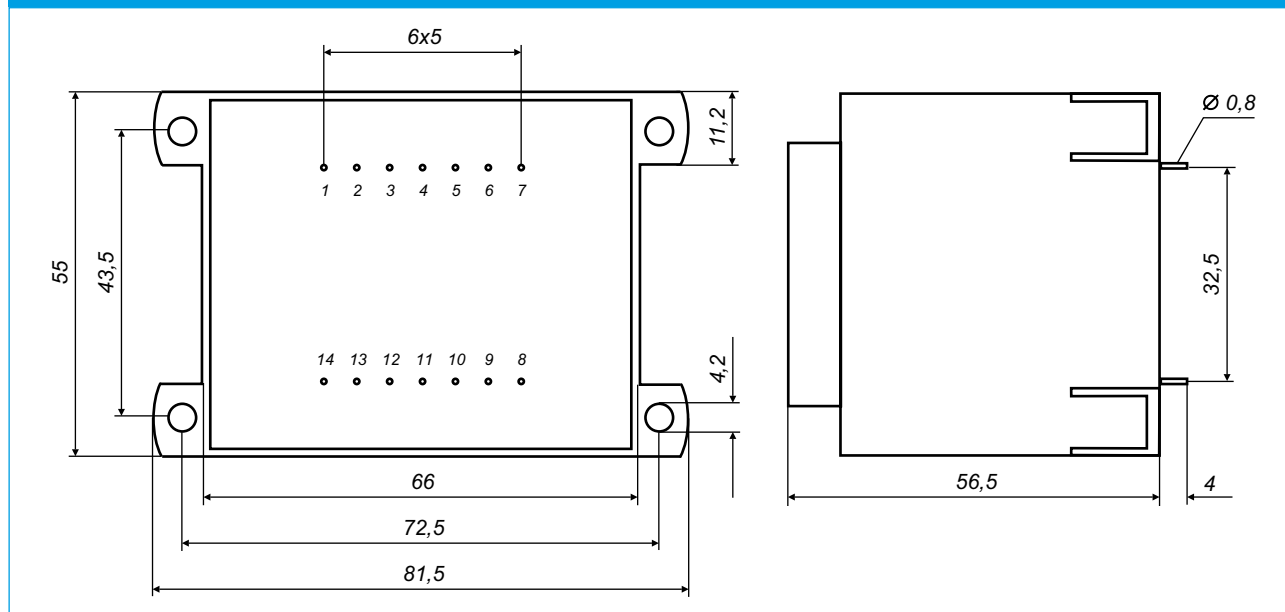

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins	Secondary protection mA
321836	230	1-7	6	5000	7,6	9-13	8,14	5
321837	230	1-7	7,5	4000	9,5	9-13	8,14	4
321838	230	1-7	9	3333	11,5	9-13	8,14	3,15
321839	230	1-7	12	2500	15,4	9-13	8,14	2,5
321840	230	1-7	15	2000	19,2	9-13	8,14	2
321841	230	1-7	18	1666	23,0	9-13	8,14	1,6
321842	230	1-7	24	1250	30,7	9-13	8,14	1,25
321843	230	1-7	2 x 6	2 x 2500	2 x 7,6	8-9 / 13-14		2 x 2,5
321844	230	1-7	2 x 7,5	2 x 2000	2 x 9,6	8-9 / 13-14		2 x 2,0
321845	230	1-7	2 x 9	2 x 1666	2 x 11,5	8-9 / 13-14		2 x 1,6
321846	230	1-7	2 x 12	2 x 1250	2 x 15,4	8-9 / 13-14		2 x 1,25
321847	230	1-7	2 x 15	2 x 1000	2 x 19,2	8-9 / 13-14		2 x 1
321848	230	1-7	2 x 18	2 x 833	2 x 23,0	8-9 / 13-14		2 x 0,8
321849*	230	1-7	2 x 24	2 x 625	2 x 30,7	8-9 / 13-14		2 x 0,63

Other voltages, currents, pin configurations and temperature classes on request.
Specifications subject to change without notice.

* Note: Product not according to EN 61558-2-6.