


TYPE: **EI66/23-ZA**

NOMINAL POWER: **30 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 750 g

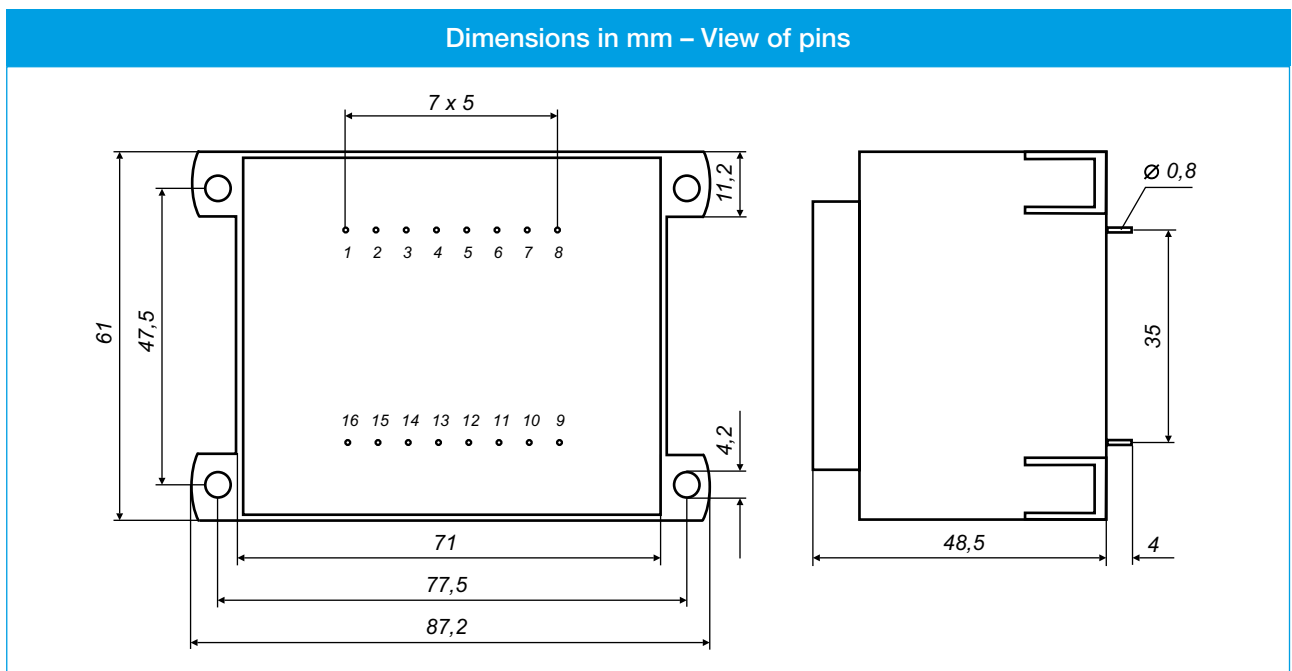

**Recommended drill – hole for pins 1,3 mm.**

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins	Secondary protection mA
321890	230	1-8	6	5000	6,9	10-15	9, 16	5
321902	230	1-8	7,5	4000	8,6	10-15	9, 16	4
321891	230	1-8	9	3333	10,3	10-15	9, 16	3,15
321892	230	1-8	12	2500	13,8	10-15	9, 16	2,5
321893	230	1-8	15	2000	17,2	10-15	9, 16	2
321894	230	1-8	18	1667	20,8	10-15	9, 16	1,6
321895	230	1-8	24	1250	27,7	10-15	9, 16	1,25
321896	230	1-8	2 x 6	2 x 2500	2 x 6,9	9-10 / 15-16		2 x 2,5
321903	230	1-8	2 x 7,5	2 x 2000	2 x 8,6	9-10 / 15-16		2 x 2
321897	230	1-8	2 x 9	2 x 1667	2 x 10,3	9-10 / 15-16		2 x 1,6
321898	230	1-8	2 x 12	2 x 1250	2 x 13,8	9-10 / 15-16		2 x 1,25
321899	230	1-8	2 x 15	2 x 1000	2 x 17,2	9-10 / 15-16		2 x 1
321900	230	1-8	2 x 18	2 x 833	2 x 20,8	9-10 / 15-16		2 x 0,8
321901*	230	1-8	2 x 24	2 x 625	2 x 27,7	9-10 / 15-16		2 x 0,63

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

\* Note: Product not according to EN 61558-2-6.