


TYPE: **EI66/34,7-ZA**

NOMINAL POWER: **47 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 750 g

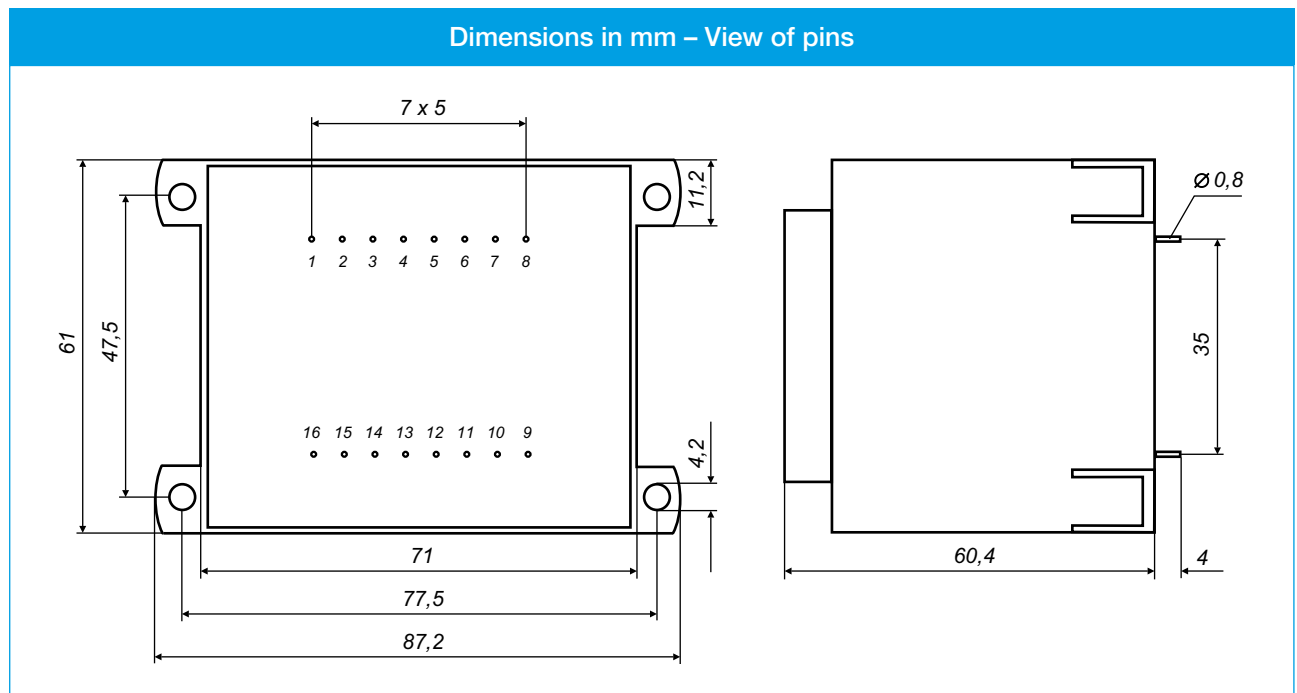

**Recommended drill – hole for pins 1,3 mm.**

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Empty pins	Secondary protection mA
321930	230	1-8	6	7833	6,9	10-15	9, 16	8
321931	230	1-8	7,5	6266	8,6	10-15	9, 16	6,3
321932	230	1-8	9	5222	10,3	10-15	9, 16	5
321933	230	1-8	12	3916	13,8	10-15	9, 16	4
321934	230	1-8	15	3133	17,2	10-15	9, 16	3,15
321935	230	1-8	18	2611	20,8	10-15	9, 16	2,5
321936	230	1-8	24	1958	27,7	10-15	9, 16	2
321937	230	1-8	2 x 6	2 x 3916	2 x 6,9	9-10 / 15-16		2 x 4
321938	230	1-8	2 x 7,5	2 x 3133	2 x 8,6	9-10 / 15-16		2 x 3,15
321939	230	1-8	2 x 9	2 x 2611	2 x 10,3	9-10 / 15-16		2 x 2,5
321940	230	1-8	2 x 12	2 x 1958	2 x 13,8	9-10 / 15-16		2 x 2
321941	230	1-8	2 x 15	2 x 1566	2 x 17,2	9-10 / 15-16		2 x 1,6
321942	230	1-8	2 x 18	2 x 1305	2 x 20,8	9-10 / 15-16		2 x 1,25
321943*	230	1-8	2 x 24	2 x 979	2 x 27,7	9-10 / 15-16		2 x 1

Other voltages, currents, pin configurations and temperature classes on request.  
Specifications subject to change without notice.

\* Note: Product not according to EN 61558-2-6.