


TYPE: UI39/10,2-ZA


NOMINAL POWER: 14 VA

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted vacuum
- 100 % tested production
- Weight 315 g

Dimensions in mm – View of pins

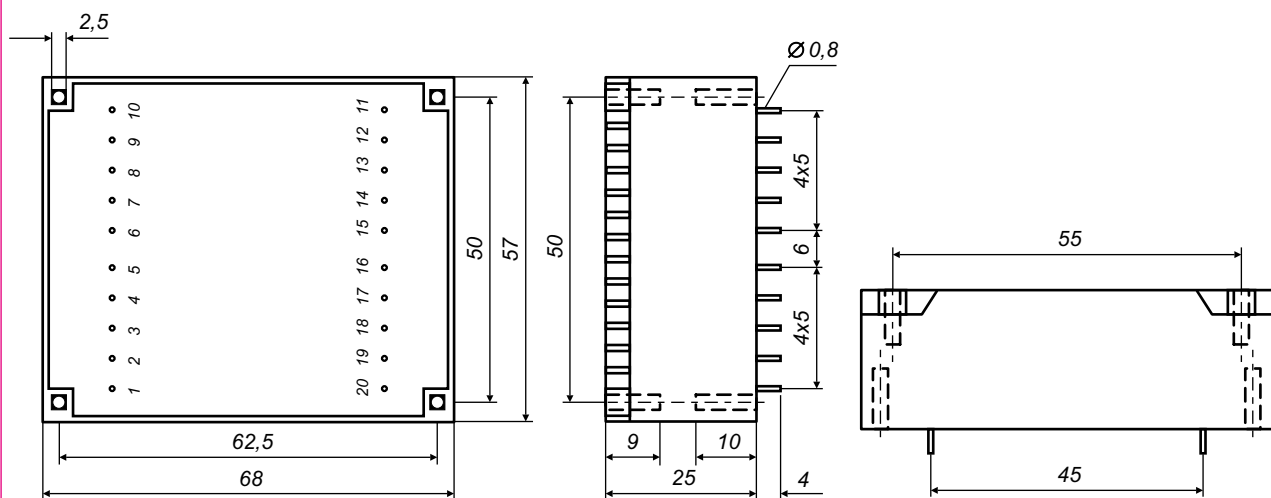

Connection possibilities:

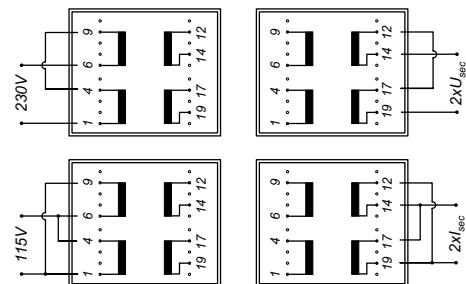

Recommended drill – hole for pins 1,3 mm.
Recommended drill – hole for mountings 4 mm.
Fixing with sheet-metal screws (2,9 x L DIN 7971).

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Secondary protection mA
322110	2 x 115	1-4 / 9-6	2 x 6	2 x 1166	2 x 7,8	12-14 / 19-17	80 / 160
322116	2 x 115	1-4 / 9-6	2 x 7,5	2 x 933	2 x 9,8	12-14 / 19-17	80 / 160
322111	2 x 115	1-4 / 9-6	2 x 9	2 x 777	2 x 11,2	12-14 / 19-17	80 / 160
322112	2 x 115	1-4 / 9-6	2 x 12	2 x 583	2 x 14,8	12-14 / 19-17	80 / 160
322113	2 x 115	1-4 / 9-6	2 x 15	2 x 466	2 x 18,8	12-14 / 19-17	80 / 160
322114	2 x 115	1-4 / 9-6	2 x 18	2 x 388	2 x 22,7	12-14 / 19-17	80 / 160
322115*	2 x 115	1-4 / 9-6	2 x 21	2 x 333	2 x 24,8	12-14 / 19-17	80 / 160

Other voltages, currents, pin configurations and temperature classes on request.
 Specifications subject to change without notice.
 * Note: product not according to EN 61558-2-6.