


TYPE: **UI39/17-ZA**


NOMINAL POWER: **24 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 445 g

Dimensions in mm – View of pins

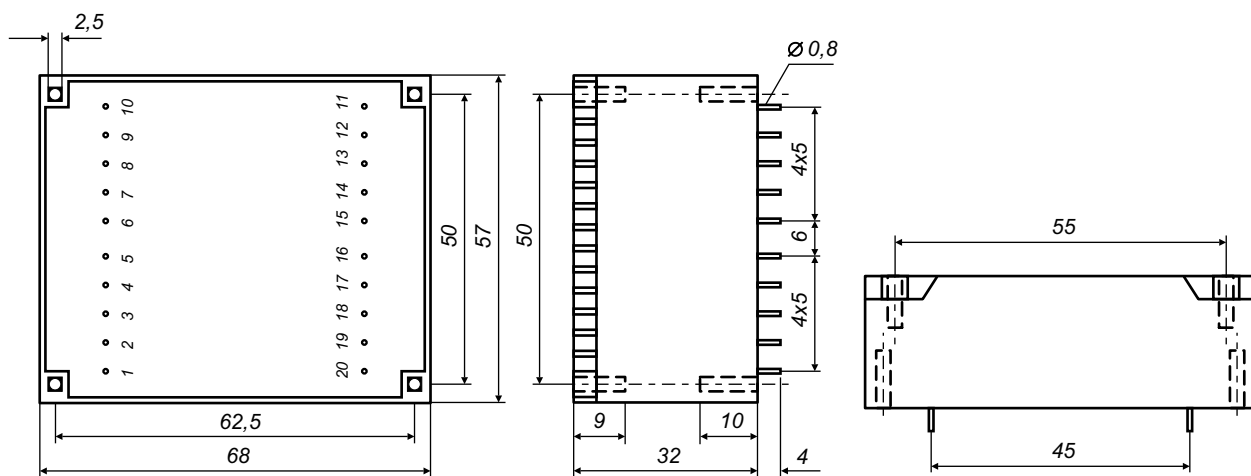

Connection possibilities:

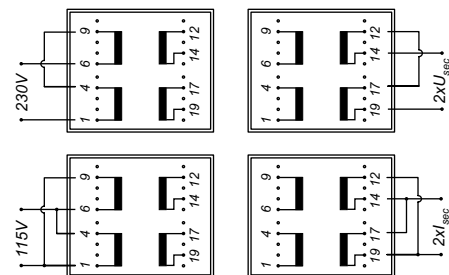

**Recommended drill – hole for pins 1,3 mm.**  
**Recommended drill – hole for mountings 4 mm.**  
**Fixing with sheet-metal screws (2,9 x L DIN 7971).**

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Secondary protection mA
322130	2 x 115	1-4 / 9-6	2 x 6	2 x 2000	2 x 8,1	12-14 / 19-17	125 / 250
322136	2 x 115	1-4 / 9-6	2 x 7,5	2 x 1600	2 x 10,1	12-14 / 19-17	125 / 250
322131	2 x 115	1-4 / 9-6	2 x 9	2 x 1333	2 x 11,1	12-14 / 19-17	125 / 250
322132	2 x 115	1-4 / 9-6	2 x 12	2 x 1000	2 x 14,4	12-14 / 19-17	125 / 250
322133	2 x 115	1-4 / 9-6	2 x 15	2 x 800	2 x 19,2	12-14 / 19-17	125 / 250
322134	2 x 115	1-4 / 9-6	2 x 18	2 x 666	2 x 22,1	12-14 / 19-17	125 / 250
322135*	2 x 115	1-4 / 9-6	2 x 21	2 x 571	2 x 24,7	12-14 / 19-17	125 / 250

Other voltages, currents, pin configurations and temperature classes on request.  
 Specifications subject to change without notice.  
 \* Note: product not according to EN 61558-2-6.