


TYPE: UI48/17-ZA


NOMINAL POWER: 40 VA

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 40/E
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 760 g

Dimensions in mm – View of pins

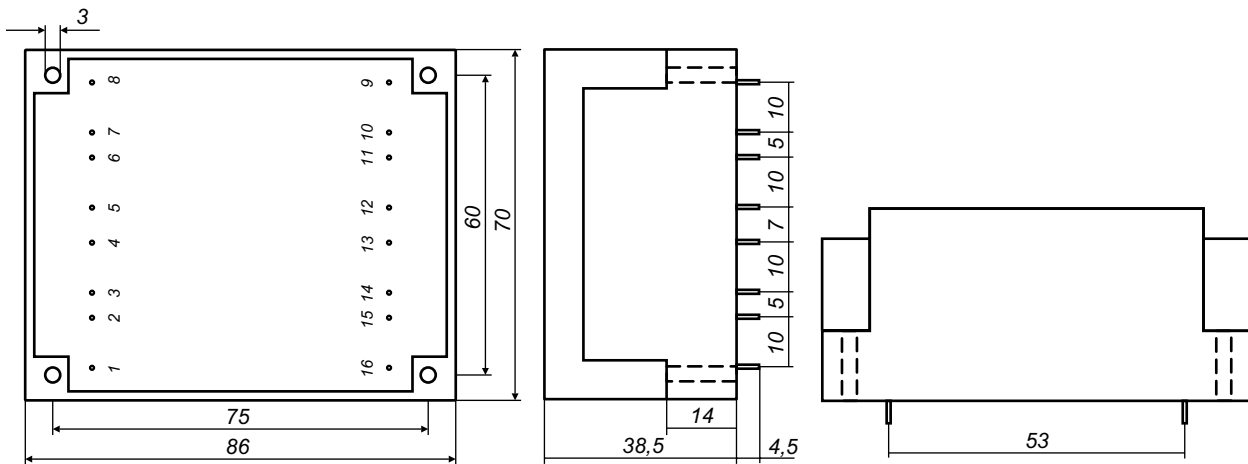

Connection possibilities:

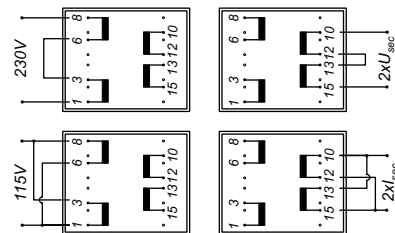

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Secondary protection mA
322150	2 x 115	1-3 / 6-8	2 x 6	2 x 3333	2 x 8,1	12-14 / 19-17	3,15 / 6,3
322151	2 x 115	1-3 / 6-8	2 x 7,5	2 x 2667	2 x 10,1	12-14 / 19-17	2,5 / 5
322152	2 x 115	1-3 / 6-8	2 x 9	2 x 2222	2 x 11,1	12-14 / 19-17	2,5 / 5
322153	2 x 115	1-3 / 6-8	2 x 12	2 x 1667	2 x 14,4	12-14 / 19-17	1,6 / 3,15
322154	2 x 115	1-3 / 6-8	2 x 15	2 x 1333	2 x 19,2	12-14 / 19-17	1,6 / 3,15
322155	2 x 115	1-3 / 6-8	2 x 18	2 x 1111	2 x 22,1	12-14 / 19-17	1,25 / 2,5
322156*	2 x 115	1-3 / 6-8	2 x 21	2 x 952	2 x 24,7	12-14 / 19-17	1 / 2

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

* Note: product not according to EN 61558-2-6.