
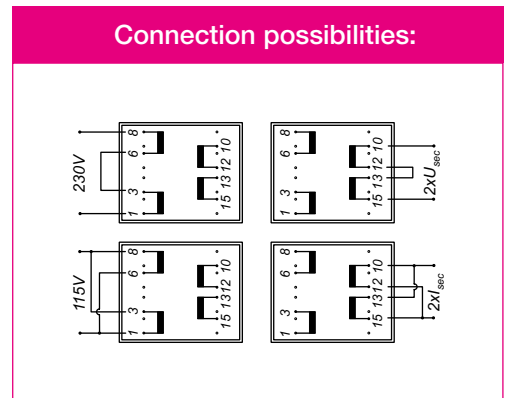


TYPE: **UI48/26-ZA**

NOMINAL POWER: **60 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 40/E
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 1060 g

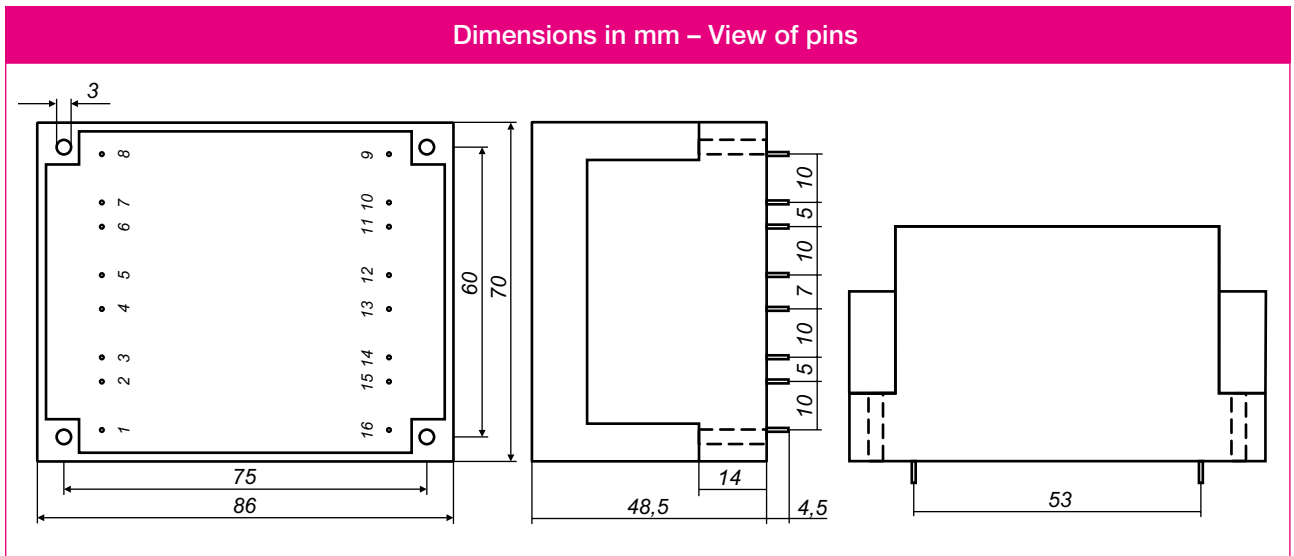

Recommended drill – hole for pins 1,3 mm.

Art. number	Primary voltage V	Pins	Secondary voltage V	Secondary current mA	No load voltage V	Pins	Secondary protection mA
322160	2 x 115	1-3 / 6-8	2 x 6	2 x 5000	2 x 8,1	12-14 / 19-17	5 / 10
322161	2 x 115	1-3 / 6-8	2 x 7,5	2 x 4000	2 x 10,1	12-14 / 19-17	4 / 8
322162	2 x 115	1-3 / 6-8	2 x 9	2 x 3333	2 x 11,1	12-14 / 19-17	3,15 / 6,3
322163	2 x 115	1-3 / 6-8	2 x 12	2 x 2500	2 x 14,4	12-14 / 19-17	2,5 / 5,0
322164	2 x 115	1-3 / 6-8	2 x 15	2 x 2000	2 x 19,2	12-14 / 19-17	2 / 4
322165	2 x 115	1-3 / 6-8	2 x 18	2 x 1666	2 x 22,1	12-14 / 19-17	1,6 / 3,15
322166*	2 x 115	1-3 / 6-8	2 x 21	2 x 1428	2 x 24,7	12-14 / 19-17	1,6 / 3,15

Other voltages, currents, pin configurations and temperature classes on request.

Specifications subject to change without notice.

* Note: product not according to EN 61558-2-6.