

CBK – ADHESIVE LINED CROSSLINKED POLYOLEFIN

Designed to environmentally seal electronic wire harness assemblies.

FEATURES AND BENEFITS


- Very high shrink ratio
- Special adhesive flows readily during installation to fill voids
- Resistant to acids, alkalis and gasoline
- Shrink ratio: >4:1
- Continuous operating temperature: -40°C to 125°C
- Shrink temperature: 120°C min.

STANDARDS

- Approved to industrial OEM sealing specifications

TYPICAL APPLICATIONS

- Environmental sealing
- Sealing and strain relief of connectors and terminals
- Abrasion protection and electrical insulation of wiring harness splices

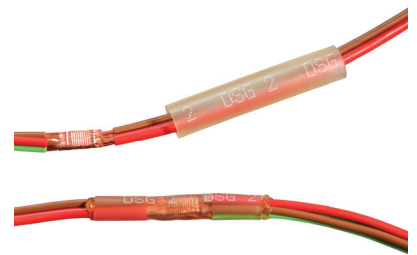

>4:1

SHRINK RATIO

-40°C to 125°C
(-40°F to 257°F)

CONTINUOUS OPERATING
TEMPERATURE

MARKETS:

Industrial

STANDARDS:




RoHS

Adhesive lined crosslinked polyolefin

DIMENSIONS

ORDER NUMBER	EXPANDED		RECOVERED				DELIVERY UNITS	
	Internal Diameter (min) D		Internal Diameter (max) d		Total Wall Thickness (nom) W		Spool	
	MM	IN	MM	IN	MM	IN	M	FT
1	6.0	0.236	1.4	0.055	1.45	0.057	300	984
2	8.0	0.315	1.6	0.063	1.75	0.069	200	656
3	12.0	0.472	2.5	0.098	2.35	0.093	100	328
4	18.0	0.709	4.5	0.177	2.65	0.104	50	164

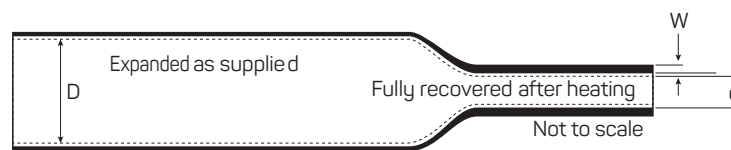

ORDERING

Select a dimension which will shrink snugly over the application to be covered. If recovery is restricted the resultant wall thickness will be less than specified.

- Select options:
 - Color: Black (BK), clear (CL)
- Please specify the product name, order number and options you require
- Example:* CBK, size 3, 100 m, black

Please contact your Customer Service Representative for information on custom colors, sizes, lengths and material data sheet.

FOR FURTHER INFORMATION, PLEASE CONTACT:

Americas: 800 422 6872 Canada: 800 845 6808 Asia Pacific: +86 512 82280099 Europe: +49 2226 9047 355

We advise that customers should separately evaluate the suitability of our products for their particular application. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. Please ask for the latest version of this data sheet. Subject to modification without prior notice.