


TYPE: **EI48/16,8-ZA**

NOMINAL POWER: **10,0 VA**

- According to EN 61558-2-6
- Two compartments bobbins
- Insulation class T 70/B
- Insulation voltage 4 kV
- Potted under vacuum
- 100 % tested production
- Weight 300 g

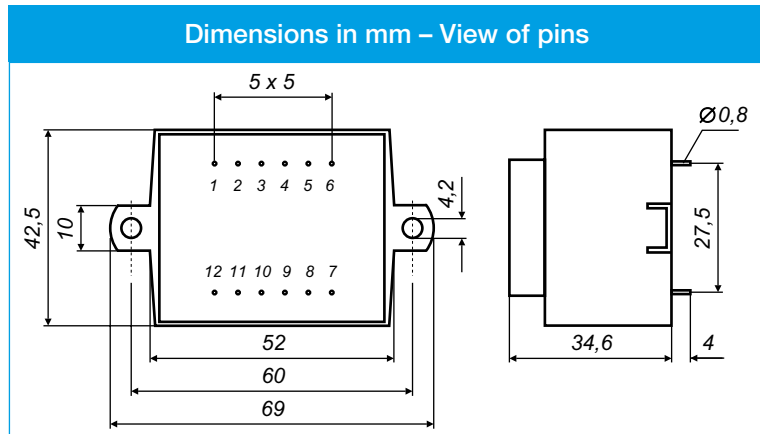

**Recommended drill – hole for pins 1,3 mm.**

| Art. number | Primary voltage V | Pins | Secondary voltage V | Secondary current mA | No load voltage V | Pins        | Empty pins | Secondary protection mA |
|-------------|-------------------|------|---------------------|----------------------|-------------------|-------------|------------|-------------------------|
| 321600      | 230               | 1-6  | 6                   | 1666                 | 7,5               | 8-11        | 7,12       | 63                      |
| 321612      | 230               | 1-6  | 7,5                 | 1333                 | 9,4               | 8-11        | 7,12       | 63                      |
| 321602      | 230               | 1-6  | 9                   | 1111                 | 11,4              | 8-11        | 7,12       | 63                      |
| 321604      | 230               | 1-6  | 12                  | 834                  | 15,2              | 8-11        | 7,12       | 63                      |
| 321606      | 230               | 1-6  | 15                  | 666                  | 18,9              | 8-11        | 7,12       | 63                      |
| 321608      | 230               | 1-6  | 18                  | 555                  | 22,6              | 8-11        | 7,12       | 63                      |
| 321610      | 230               | 1-6  | 24                  | 416                  | 30,2              | 8-11        | 7,12       | 63                      |
| 321620      | 230               | 1-6  | 2 x 6               | 2 x 834              | 2 x 7,6           | 7-8 / 11-12 |            | 63                      |
| 321613      | 230               | 1-6  | 2 x 7,5             | 2 x 666              | 2 x 9,5           | 7-8 / 11-12 |            | 63                      |
| 321622      | 230               | 1-6  | 2 x 9               | 2 x 555              | 2 x 11,3          | 7-8 / 11-12 |            | 63                      |
| 321624      | 230               | 1-6  | 2 x 12              | 2 x 416              | 2 x 15,1          | 7-8 / 11-12 |            | 63                      |
| 321626      | 230               | 1-6  | 2 x 15              | 2 x 333              | 2 x 19,0          | 7-8 / 11-12 |            | 63                      |
| 321628      | 230               | 1-6  | 2 x 18              | 2 x 277              | 2 x 22,6          | 7-8 / 11-12 |            | 63                      |
| 321630*     | 230               | 1-6  | 2 x 24              | 2 x 208              | 2 x 29,0          | 7-8 / 11-12 |            | 63                      |
| 321640      | 115               | 1-6  | 6                   | 1666                 | 7,5               | 8-11        | 7,12       | 125                     |
| 321614      | 115               | 1-6  | 7,5                 | 1333                 | 9,4               | 8-11        | 7,12       | 125                     |
| 321642      | 115               | 1-6  | 9                   | 1111                 | 11,4              | 8-11        | 7,12       | 125                     |
| 321644      | 115               | 1-6  | 12                  | 834                  | 15,2              | 8-11        | 7,12       | 125                     |
| 321646      | 115               | 1-6  | 15                  | 666                  | 18,9              | 8-11        | 7,12       | 125                     |
| 321648      | 115               | 1-6  | 18                  | 555                  | 22,6              | 8-11        | 7,12       | 125                     |
| 321650      | 115               | 1-6  | 24                  | 416                  | 30,2              | 8-11        | 7,12       | 125                     |
| 321652      | 115               | 1-6  | 2 x 6               | 2 x 834              | 2 x 7,6           | 7-8 / 11-12 |            | 125                     |
| 321615      | 115               | 1-6  | 2 x 7,5             | 2 x 666              | 2 x 9,5           | 7-8 / 11-12 |            | 125                     |
| 321654      | 115               | 1-6  | 2 x 9               | 2 x 555              | 2 x 11,3          | 7-8 / 11-12 |            | 125                     |
| 321656      | 115               | 1-6  | 2 x 12              | 2 x 416              | 2 x 15,1          | 7-8 / 11-12 |            | 125                     |
| 321658      | 115               | 1-6  | 2 x 15              | 2 x 333              | 2 x 19,0          | 7-8 / 11-12 |            | 125                     |
| 321660      | 115               | 1-6  | 2 x 18              | 2 x 277              | 2 x 22,6          | 7-8 / 11-12 |            | 125                     |
| 321662*     | 115               | 1-6  | 2 x 24              | 2 x 208              | 2 x 29,0          | 7-8 / 11-12 |            | 125                     |

Other voltages, currents, pin configurations and temperature classes on request.  
Specifications subject to change without notice.

\* Note: Product not according to EN 61558-2-6.